



MANUDYNE
SYSTEMS INCORPORATED

349 First Street, Los Altos, CA 94022 ■ (415) 949-1747

Manudyne Report 83-2-3

MINIMUM-COMPLEXITY HELICOPTER SIMULATION MATH MODEL PROGRAM

Robert K. Heffley
Marc A. Mnich

October 1986

Contract NAS2-11665
U. S. Army Aeroflightdynamics Directorate
Ames Research Center
Moffett Field, CA 94035

TABLE OF CONTENTS

I.	Introduction	1
A.	Background	1
	1. Computational Delays	2
	2. Cost of Resources	2
	3. Inflexibility	3
	4. Indirectness of Cause and Effect Relationships ..	4
B.	Merits of Considering a Simple Math Model Form	4
	1. Cost	4
	2. Quality	5
	3. Engineering Understanding	5
C.	Model Attributes to be Considered	5
	1. Simulator Application	5
	2. Handling Qualities Application	5
	3. Full Flight Envelope Operation	6
	4. Modularity	6
	5. Microcomputer Adaptability	6
D.	Report Organization	6
	1. Modeling Approach	6
	2. Matching and Estimating Procedures	7
	3. Checkout Procedures	7
	4. Model Extensions and Refinements	7
II.	Technical Approach	8
A.	Specification of Desired Math Model Features	8
	1. First-Order Flapping	9
	2. Main Rotor Induced-Velocity Computation	9
	3. Rigid-Body Degrees of Freedom	9
	4. Power Requirements Over Flight Envelope	9
	5. Rearward and Sideward Flight	10
	6. Hover Dynamic Modes	10
	7. Forward Flight Dynamic Modes	10
	8. Correct Transition from Hover to Forward Flight ..	10
	9. Effects of Rotor RPM Variation	11
	10. Cross Coupling	11
	11. Correct Power-Off Glide	11
B.	Component Build-Up	11
	1. Main rotor	14
	2. Fuselage	14
	3. Tail Rotor	15
	4. Horizontal Tail	15
	5. Wing	15
	6. Vertical Tail	15
C.	Definition of Model Equations	17
	1. Main Rotor Thrust and Induced Velocity	17
	2. Tail Rotor Thrust and Induced-Velocity	18

3.	Fuselage Geometry and Drag	19
4.	Horizontal Tail Geometry and Lift	20
5.	Wing Geometry and Lift	21
6.	Vertical Tail Geometry and Lift	22
7.	Total Power Required	23
8.	Summation of Force and Moment Equations	23
9.	Integration and Axis Transformation	24
10.	Summary of Model Parameters	25
III.	Model Matching and Estimation Procedures	27
A.	Mass, Loading, and Geometry Data	27
1.	Geometric Data	27
2.	Mass and Loading Data	29
B.	Propulsion Data	32
C.	Rotor Data	35
D.	Aerodynamic Features	35
E.	Hover Performance	38
F.	Forward Flight Data	40
IV.	Checkout Procedures	45
A.	General	45
B.	Discussion of Checkout Procedure Elements	45
1.	Independent Operating Program	45
2.	Trim Point Verification	46
3.	State Transition Verification	47
4.	Time History Overlays	50
5.	Dominant Response Identification	52
V.	Model Extensions and Refinements	53
A.	Flight Control System	53
B.	Engine-Governor	53
C.	Ground Effect	53
D.	54
E.	Higher-Order Flapping, Coning, and Lagging	54
References	55
Appendix A.	Listing Of Dynamics Subroutine	A-1
Appendix B.	Definition of Dynamics Subroutine Symbols	B-1
Appendix C.	Input Data	C-1
Appendix D.	Agusta A-109 Math Model Example	D-1

LIST OF FIGURES

Figure 1. Tradeoff of Math Model Cost with User Utility. ... 1

Figure 2. Basic Helicopter Math Model Components. 12

Figure 3. Main Rotor Thrust and Induced-Velocity Block
Diagram. 17

Figure 4. Basis for Geometric Data. 28

Figure 5. Basis for Loading Data. 30

Figure 6. Basis for Torque (Power) Limits. 34

Figure 7. Basis for Initial Estimates of Aerodynamic
Parameters. 37

Figure 8. Basis for Hover Power Required. 39

Figure 9. Basis for Forward Flight Speeds and Power
Required. 41

Figure 10. Basis for Max Rate of Climb Speed and Power
Required. 42

Figure 11. Basis for Max Glide Speed and Descent Angle. 43

Figure 12. Sample of Trim Point Printout. 46

Figure 13. Examples of Time Histories to be Used for
Overlays. 51

LIST OF TABLES

Table 1.	Desired Response Features	8
Table 2.	Details of Component Build-Up.	13
Table 3.	Basis for Inertial Data	31
Table 4.	Basis for Propulsion System Data.	33
Table 5.	Assumed Breakdown of Power Absorbtion.	33
Table 6.	Sample of State Transition Checks.	48

ABSTRACT

An example of a minimal complexity simulation helicopter math model is presented. Motivating factors are the computational delays, cost, and inflexibility of the very sophisticated math models now in common use. A helicopter model form is given which addresses each of these factors and provides better engineering understanding of the specific handling qualities features which are apparent to the simulator pilot. The technical approach begins with specification of features which are to be modeled followed by a build-up of individual vehicle components and definition of equations. Model matching and estimation procedures are given which enable the modeling of specific helicopters from basic data sources such as flight manuals. Checkout procedures are given which provide for total model validation. A number of possible model extensions and refinements are discussed. Math model computer programs are defined and listed.

FOREWORD

This report was prepared by Manudyne Systems, Inc., for the U. S. Army Aeroflightdynamics Laboratory located at Ames Research Center. The Contract Technical Monitors were Ms. Michelle M. Eshow and Mr. Christopher L. Blanken.

The Manudyne project engineer was Mr. Robert K. Heffley and the math model development effort was conducted by Mr. Marc A. Mnich.

MINIMUM-COMPLEXITY HELICOPTER SIMULATION MATH MODEL PROGRAM

I. Introduction

A. Background

Over the past decade there has been a trend toward increasingly complex simulator math models. Part of this has been a result of flight control system sophistication and attention toward a number of aerodynamic factors, including aeroelastic effects. Another reason is the availability of large, high speed mainframe and mini-computers. Perhaps the most distressing reason for increasing complexity is the general hesitance to determine precisely the degree of complexity really needed for a given application. Unfortunately this trend has some serious implications for and effects on the management and operation of flight simulation.

The question being considered is really one of value versus cost. The value must ultimately be expressed as the utility of a math model to provide necessary features which can be appreciated by the simulator pilot. It is expected that as a function of complexity, this quality approaches a fairly flat asymptote with some reasonable level of complexity. The other side of the coin is the cost of math model development and checkout, also as a function of complexity. Unfortunately this function can be expected to increase exponentially. Both these relationships are sketched in Figure 1. The obvious question for the simulator user is at what level of model complexity do these two curves cross.

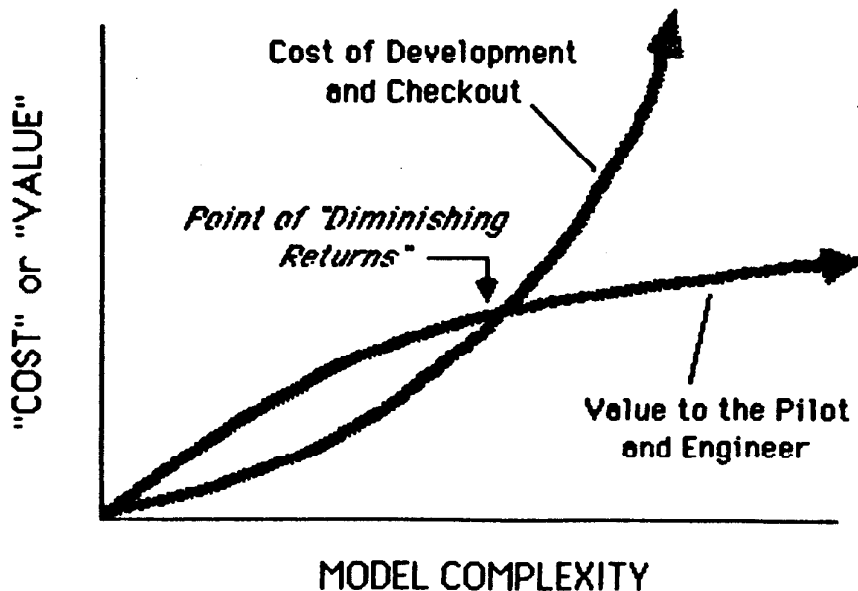


Figure 1. Tradeoff of Math Model Cost with User Utility.

Experience typical of those described in References 1 and 2 has shown that math model complexity alone does not automatically provide effectiveness in handling qualities simulations. Rather, there can be distracting factors which work counter to simulation objectives. Ultimately, limited resources prevent one from realizing the full potential of an overly complex simulator math model. Other limitations can be a lack of flexibility in modeling and restricted clarity in the cause and effect relationships between model parameters and features. These shortcomings raise questions about the value of complexity in helicopter math models and are a motivation to consider simpler models.

1. Computational Delays

Computational lag and delay is a particularly important problem resulting from model complexity. As complexity grows, computational delay associated with the math model code increases and, in turn, compounds overall visual system delay. Computer speed is limited by the hardware and software system being used and cannot be easily changed.

The result of the delays imposed is reduced fidelity. NASA Ames, for example, employs both a Xerox Sigma 8 and CDC 7600 for their Vertical Motion Simulator (VMS). Using the currently implemented ARMCOP helicopter math model (Reference 3) and the faster of the two computers (CDC 7600), the computational delay is about 25 milliseconds. The Sigma may require 60 to 75 milliseconds to cycle. The former speed is acceptable but CGI delays of about 100 milliseconds can still remain. The problem of delay has been addressed and software added to alleviate it. Thus more complexity has been added to correct a problem originally caused by complexity. This is not as effective as preventing the problem by simplifying code or using a faster computer.

2. Cost of Resources

As model complexity and the amount of computer code grows, so does the time and effort required to implement, check, and debug the code. The time available to do these is often limited and can affect overall math model fidelity if neglected. ARMCOP, for example, has several thousand lines of code. In checking and debugging code in large programs, a certain number of errors will go undetected, and the more code there is, the more likely errors will persist.

In addition to checking and debugging code there is the task of determining model parameters needed to represent a specific aircraft. The time and effort required to thoroughly check the model against the real aircraft can be an expensive part of the simulation being run. Math models employing look-up tables can have hundreds of parameters which need to be set and

confirmed. Since some of these values are estimations, an iterative process may be required. Limits on time and manpower may restrict this process and the fidelity of the model.

Validation of the math model equations (as opposed to math model code) is also a process which may require iteration as the model is changed. It is possible that errors in the math model will exist even as the model is being used in simulation. Again, the number of errors which exist and the time required to fix them is a function of the complexity of the model. Time and manpower restrictions will limit the ability of the users to find and correct these errors and thus degrade the fidelity of the model. In order to guarantee that a model is completely correct, all parts of the model must be exercised. Lookup tables, for example, require that all numbers in the table be verified as well as checked for discontinuities. All equations in the model need to be checked to ensure they are theoretically sound. With complex code, it is unlikely that all of the model will be checked as thoroughly as necessary and errors can persist in actively used models for long periods of time before they are ever noticed or corrected.

ARMCOP, for example, still contains at least a serious error affecting maneuvering flight even though the model has seen wide use. This error involves a large speed loss in sustained turns. Although detected, this problem has not been corrected because of time constraints. Rather it has been "patched up" with flight control system modifications. Again, complexity is added to fix a problem itself arising from model complexity.

3. Inflexibility

There is an inherent tradeoff between complexity and flexibility in models of dynamic systems. As more components or features are added to a model, it becomes increasingly difficult and expensive to perform other modifications. One measure of the flexibility of a model is its adaptability to new computer systems and languages or to changes in the code. Large sets of code are limited to large computer systems. ARMCOP, for example, requires the use of a mainframe system. In order to work with the model, one must have access to such facilities.

Once code has been implemented on a machine, it must be checked and debugged. Modifications for debugging may require recompilation and require significant amounts of time for large code. Most of these changes are made before the code is used for actual simulation, but it is possible that changes are needed during simulation. Even simple changes can consume enough time to hamper productivity. Changing a single parameter in ARMCOP, for example, requires a minimum down time of 20 minutes.

The ability to add, remove, or modify efficiently the dynamic characteristics of a model is another measure of its flexibility. It may be desirable, for example, to have a

helicopter simulation without rotor cross coupling. A model such as ARMCOP, in which cross coupling is inherent, does not allow easy removal of this feature. In fact, it would probably be "removed" by adding control system features to null the coupling thus further increasing the complexity of the model. The emphasis in modeling should be with the efficiency of the model while maintaining adequate fidelity.

4. Indirectness of Cause and Effect Relationships

The ability to see the relationship between model parameters and model response features is decreased with complexity. This relationship is important to handling qualities simulation work for two reasons. First, is the need to easily make changes in model features. Second is the need to trace errors which appear in the response modes of the model. These are fundamental to working effectively with the model. In order to modify response features, one must know what parameters are responsible for those features and how to change them. In complex models, individual parameters tend to become coupled to many features at once making it difficult to change features independently.

B. Merits of Considering a Simple Math Model Form

It would appear that there are compelling benefits for general reductions in the levels of complexity exemplified by math models such as ARMCOP and GENHEL. This leads us to consider ways to find a compromise between math model complexity and simulator utility. At one extreme are the highly complex models which attempt to achieve effectiveness through high computational fidelity. As mentioned, these models encounter practical limits which not only hamper fidelity but also reduce their flexibility and clarity between parameters and features. At the other extreme are models such as the linearized stability derivative form which are easier to manage but which may lack fidelity or be restricted to a small operating envelope.

The merits of a "compromise" models form will thus be cost and quality benefits derived from the achievement of specific fidelity features through minimal software, i. e., program instructions.

1. Cost

The cost benefits will accrue through minimizing labor required to quantify and checkout the math model implementation. Development of even modest math models typically involve more than one man year of labor. If this process can be shortened to less than one man-month, the period envisioned for the proposed form, then great savings clearly can be realized.

Simulator math model software checkout can also require substantial effort. However, this is often simply limited by

time available and the job might not actually be completed prior to simulator use. Again the aim is to realize greatly reduced checkout time through software reduction and to make a comprehensive checkout feasible within a short period of time.

2. Quality

The quality benefits come from confidence that specific features needed for effective simulation are represented and that they are correct. Here quality arises from the fact that implementation and checkout tasks which should be done are, in fact, done. In a real sense, quality follows the degree of manageability afforded by the simulator software.

3. Engineering Understanding

One of the most important benefits to be derived from a minimum-complexity math model is in the potential for more clearly understanding cause and effect relationships. For example, if a particular kind and amount of cross-coupling is desired, then how does one achieve it through adjustment of math model parameters? It is possible by having a close, easy-to-follow connection between the physical component representation and the resulting physical response features.

An important value of engineering understanding is the ability to make model adjustments or refinements in a direct, efficient manner.

C. Model Attributes to be Considered

1. Simulator Application

It should be stressed, here, that in this case the goal of the math model is to be an effective tool for simulation. Model fidelity alone is not the solution to simulator effectiveness. Rather, it is the ability of the model to produce the desired results for the given application. Besides having adequate fidelity, the model must also be affordable, manageable, easily modified and checked, and have a clear cause and effect relationship between parameters and features.

2. Handling Qualities Application

Thus we are motivated to turn to a simple model with these qualities for helicopter handling qualities simulation which can be a more effective tool than existing models. Specifically, the purpose here is to propose a minimum-complexity model format suitable for helicopter handling qualities simulation.

It should be remembered that most handling qualities investigations involve examination of fairly crude and simple parameters such as time constants, damping ratios, or static gains. Furthermore the precision with which evaluation pilots

can see such changes is often disappointingly low. Thus it is not reasonable to expect that high math model resolution is really crucial. If a pilot cannot actually observe or be influenced by certain math model effects then those effects should probably be considered as excessive complication.

3. Full Flight Envelope Operation

The model will be nonlinear and will apply to the full operating range of a real helicopter including rearward as well as forward flight, sideward flight, hover, and transition from hover to forward flight. The model will include first order flapping degrees of freedom and all rigid body degrees of freedom. Not included will be the higher order flapping modes and any structural modes as they are well beyond the frequency range of interest for handling qualities.

4. Modularity

The form of the model will be modular. This will allow the flexibility of adding additional rotors if desired as well as any other lifting surfaces. Any combination of components can be combined including models of pilots and control systems making the model adaptable to a variety of helicopters and subsystems. The full utility of the model format will become apparent as the structure of the model is described in more detail.

5. Microcomputer Adaptability

The math model form will be compatible with microcomputer use, at least on a non-real-time basis. It has been found that math model development and checkout can be done to a large extent on small, inexpensive desktop microcomputers. This of course demands that the software be reasonable compact.

D. Report Organization

The presentation to follow will consist of four parts: (i) approach to modeling, (ii) matching and estimation procedures, (iii) checkout procedures, and (iv) extensions and modifications of the model. In addition various detailed information will be contained in appendices.

1. Modeling Approach

In the first section, the modeling approach will be described in order to establish the theoretical foundation for the model. This will also be useful for understanding, modifying or extending the model and for its effective use as a simulator tool. In addition, a description of the features and components of this specific model is given. The model is used to represent a Bell AH-1S Cobra. All parameters and variables from this aircraft are provided here along with the actual code. The

sample version will show the extent of the code in terms of number of parameters, number of lines of code, number of computations, etc. and will be compared to an ARMCOF version of the same aircraft.

2. Matching and Estimating Procedures

In the next section, the matching and estimating procedures used to obtain model parameters are described. The sample version of the AH-1S is used as a specific example. The model is then exercised and the estimated parameters varied in order to tune the model to fit performance data.

3. Checkout Procedures

The third section describes several methods of checking the math model code. The size of the model and the modular format are conducive to efficient checking. Methods are then presented for verifying the math model equations and are illustrated using the sample version.

4. Model Extensions and Refinements

Finally, in the last section, possibilities for extending or modifying the model are introduced to demonstrate the flexibility of the model format. The potential for a much improved level of simulation effectiveness using these extensions and modifications is revealed and explained in terms of the approach taken to the modeling process.

II. Technical Approach

A. Specification of Desired Math Model Features

The approach to modeling will begin with a list of desired features. This list will serve as a specification upon which to formulate a minimum-complexity model containing only those components and equations directly responsible for the desired features. The model will be customized to the problem being studied.

We shall assume that the model is intended for handling qualities simulation and that the features to be included in the model should be features visible to a pilot. The response features to be contained are listed in Table 1.

Table 1. Desired Response Features

-
1. First-order flapping dynamics for main rotor.
 2. Main rotor induced velocity computation.
 3. All rigid-body degrees of freedom.
 4. Realistic power req'ts over the desired flight envelope.
 5. Rearward and sideward flight without computational singularities.
 6. Hover dynamic modes:
 - Longitudinal and lateral hover cubics
 - Rotor-body coupling with flapping
 7. Forward flight dynamic modes:
 - Short period
 - Phugoid
 - Roll mode
 - Dutch roll
 - Rotor-body coupling with flapping
 8. Dihedral effect.
 9. Correct transition from hover to forward flight.
 10. Potential for rotor RPM variation.
 11. Correct power-off glide for min rate of descent and max glide.

1. First-Order Flapping

It has been shown in Reference 4 that rotor flapping can couple with rigid-body modes in regions which affect handling qualities. This occurs in the lower frequency or "regressing flapping" modes. However, this effect can be modeled with a first-order flapping equation in each the pitch and roll axes.

The time constant involved in the regressing flapping mode is directly proportional to the product of rotor angular velocity and Lock number. Thus only the commonly available rotor mass and geometric parameters are needed.

The actual flapping response is modified by coupling with the fuselage at the hub restraint. Since this involves the classical rigid body modal response, it will be further discussed under items 6 and 7 below.

The feature of flapping which is most important to a pilot-in-the-loop simulation is the apparent control lag following cyclic input. This lag is in effect the time required to precess the tip path plane to a new orientation. A typical value for the effective lag is about 0.1 sec--significant because it is comparable to the pilot's own neuromuscular lag.

2. Main Rotor Induced-Velocity Computation

A particularly important feature of a helicopter is the relationship among thrust, power, and airspeed. This relationship arises from the induced-velocity of air passing through the rotor disc.

There are a number of complicating factors, but to a reasonable first-order approximation induced-velocity effects can be modeled with a classical momentum theory model wherein thrust and induced-velocity interact in an aerodynamic feedback loop. Computation is complicated, however, because this feedback is highly nonlinear.

Another aspect of the induced-velocity is its effect on adjacent surfaces. The rotor induced-velocity field impinges on the wing, horizontal tail, and fuselage and varies with airspeed and flight path direction.

3. Rigid-Body Degrees of Freedom

Normally, six rigid-body degrees of freedom are needed for useful manned simulation. Pilot workload arises from constant attention to roll, pitch, and yaw as well as translation fore-and-aft, to the side, and vertically. Only under special conditions might one desire to eliminate one of these via, for example, the assumption of perfectly coordinated forward flight.

4. Power Requirements Over Flight Envelope

A common source of real aircraft data appropriate for verifying a math model is performance data in terms of power required for various trim conditions. The power or torque required is immediately obvious and important to a pilot and varies substantially from hover through transition and finally in forward flight.

Power requirements can be easily computed once main and tail rotor induced velocities are established.

5. Rearward and Sideward Flight

In a full-flight-envelope model involving circulation lifting surfaces, computational singularities can exist, depending upon the model form used. These singularities come from trigonometric functions for angle of attack, sideslip, etc., but are avoided in this model by using a quadratic lift coefficient method. For this technique, forces for lifting surfaces are computed using quadratic coefficients multiplied by the squares of velocity components so that negative velocities cannot cause singularities. No explicit computation of angle of attack or sideslip is needed and, indeed, should be completely avoided.

6. Hover Dynamic Modes

Hovering flight is characterized by similar dynamics in each the pitch and roll axes, including sets of high and low frequency response modes. In addition, the yaw axis contains a predominant yaw damping mode. These dynamics can couple with regressing flapping dynamics. All are apparent to the pilot in operating the aircraft whether trimming, maneuvering, or flying unattended.

Pitch and roll is classically described by the "hover cubic," but this generally neglects coupling with the rotor which can be important. This is easily computed, however, through inclusion of the flapping dynamics as described earlier.

The phugoid mode for hover results from the combination of dihedral and gravity force. Effective dihedral is particularly apparent in unaggressive sideward flight because the pilot must continually add lateral control as sideward velocity increases.

7. Forward Flight Dynamic Modes

In forward flight the dominant rigid body dynamics of a helicopter resemble those of a conventional fixed-wing airplane and include short-period, phugoid, dutch roll, and spiral modes. There is also likely to be significant coupling with flapping dynamics.

8. Correct Transition from Hover to Forward Flight

Transition effects are an important part of the piloting task when accelerating from hover into the forward flight region.

These effects are a combined result of a "dihedral effect" in the x-axis and the varying rotor downwash effect on the horizontal tail.

9. Effects of Rotor RPM Variation

Rotor RPM can affect helicopter dynamics in a number of ways, including thrust, flapping response, and heave damping.

The effects of rotor speed variation are tied, however, to the rotor-engine-governor combination. For a number of applications it may be sufficient to assume a constant rotor RPM. This will be done here.

10. Cross Coupling

A variety of cross coupling effects can be present in helicopters. Some of these such as collective-to-yaw coupling are easy-to-see first order phenomena. These are generally inherent in the basic dynamics if reasonable first-principles thrust and rotor models are used.

Other coupling effects are more subtle and should be added only where desired by the simulator user. These can be inserted directly in the equations of motion as coupling terms arising from both angular and translational velocity components or controls.

11. Correct Power-Off Glide

Helicopters, like fixed-wing aircraft, need to exhibit reasonable performance when power is reduced. This can be a highly complex issue if ring vortex rotor states are included. Generally, however, handling qualities investigations can be conducted using only the normal thrust model described above but tailoring the full-down collective pitch and aerodynamic drag to yield realistic forward-velocity glide characteristics.

B. Component Build-Up

With a specification of desired features, essential model components can then be chosen. These components contain the mechanisms which provide forces and moments, power dissipation, stability and control, and rotor dynamics.

The six components are considered necessary to provide all of the above response features are shown in Figure 2. Table 2 lists these components along with the physical elements of each component and the response features which result from them. The components and their physical elements are described and discussed individually below.

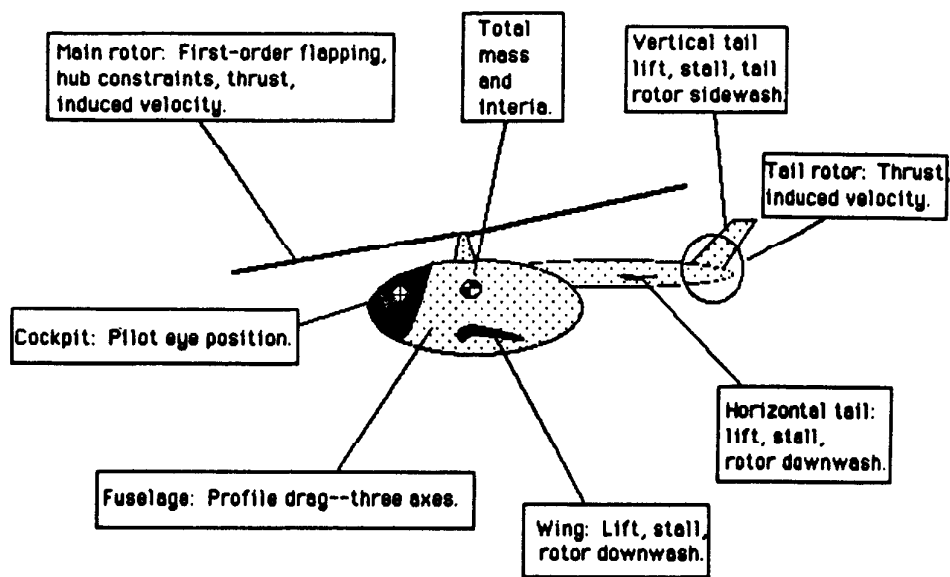


Figure 2. Basic Helicopter Math Model Components.

Table 2. Details of Component Build-Up.

Components	Physical features	Response features
1.) Main rotor:	Thrust Torque Induced velocity Tip path plane lag Induced power Profile power $L_{a1} = M_{b1} = 0$ $L_p = M_q = 0$ Constant RPM Incremental L_{b1} and M_{a1}	1st order flap- ping Power required Trim Phugoid Short period Dihedral Pitch mode Roll mode Min x-coupling Power off glide
2.) Fuselage:	Mass at C.G. Moments of inertia Parasite power Cross products of inertia = 0	Trim Power required Min x-coupling Power off glide
3.) Tail rotor:	Thrust Torque Induced velocity Induced power Profile power	Trim Power required Roll mode
4.) Horizontal tail:	Lift / Stall Exposure to main rotor induced vel.	Short period Trim Pitch mode Power required
5.) Wing:	Lift / Stall Induced drag Induced power Exposure to main rotor induced vel.	Trim Power required
6.) Vertical tail:	Lift / Stall	Dutch roll Roll mode

1. Main rotor

The primary component of this model is the main rotor. It is the main feature responsible for producing characteristics unique to a helicopter, in particular, a vertical thrust vector and an induced-velocity field. Other key ingredients include rotor torque, dihedral effect, and flapping dynamics.

The basis for the model used here is primarily the autogyro theory presented by Glauert in Reference 5 and extended by Lock in Reference 6. The higher-order flapping dynamics as defined by Chen in Reference 7 are simplified according to the model developed by Curtiss and presented in Reference 1.

Thrust and induced velocity are computed assuming a uniform flow distribution. As described earlier, the tip-path-plane orientation (flapping angles) are modeled as simple first order lags giving the main rotor the qualities of a force actuator with a lag.

The main rotor model contributes largely to the power requirement feature of the model. In hover, nearly 80% of total power is required by the main rotor. In forward flight, as much as 60% of total power is absorbed by the main rotor. Induced velocity also accounts for power losses by the fuselage in hover.

Cross coupling in the main rotor can be minimized if desired. Here control cross coupling (L_{a1} and M_{a1}) and gyroscopic cross coupling (L_q and M_p) are not included as an essential part of the main rotor model. Some of these effects would be inherent in using a more complete flapping model. But a more useful fact is that such features can be modeled directly in order to achieve the precise effect desired.

The dihedral effect is included through the variables db_1/dv and da_1/du which appear in the first order flapping equations. Values can be computed using first-principles factors consisting of thrust coefficient and tip velocity. The dihedral feature is responsible for the phugoid-like modes in hover and forward flight.

The portion of L_{b1} and M_{a1} due to both hinge offset and rotor spring stiffness are included in a separate parameter, $dM/dA1$. Thus, the total flapping stiffness can be directly varied through this one parameter.

Pitch and roll mode time constants are a function of both body pitch and roll damping and rotor tip path plane lag. Control over these time constants can thus be exercised through the flapping lag as well as body aerodynamic damping.

2. Fuselage

The fuselage is represented as a virtual flat plate drag source having three dimensions. The effective aerodynamic center can be located at any position in the body reference frame. It would normally be expected to be near the geometric center.

The fuselage drag model is based on a quadratic aerodynamic form originally found in the hydrodynamics text by Lamb (Reference 7) and used extensively for airship applications by Monk (Reference 8). This form can be easily extended to account for fuselage assymetries, lifting effects, and lift gradients.

The simple fuselage aerodynamic form presented here provides for drag in forward flight which limits maximum airspeed, drag in sideward flight, and rotor downwash impinging on the fuselage. All three of these effects are related to power losses.

3. Tail Rotor

The tail rotor component is modeled in the same manner as the main rotor except that no flapping degree of freedom is included. In effect, only Glauert's equations apply. However thrust, induced-velocity, and power effects are correctly modeled. Normal directional control is provided through the tail rotor collective pitch variation.

4. Horizontal Tail

The horizontal tail is assumed to be primarily a lift producer, thus only the normal force component is modeled. This still provides for computation of drag resulting from induced-lift if that is desired. Finally, the effects of aerodynamic stall are included. The geometric location of the horizontal tail in the rotor flow field is used to obtain the local apparent wind component. The location of the horizontal tail provides effective static stability and elevator control.

As with the fuselage aerodynamics, a basic quadratic form is used. Two terms model the effects of camber and circulation lift. One additional term and conditional test is included to model the effect of stall.

5. Wing

The wing component follows the same form as the horizontal tail. In addition, the induced drag is computed in order to obtain the related power-required component which can be significant during sustained-g maneuvering.

6. Vertical Tail

The vertical tail is also similar to the horizontal tail except that it experiences the flow field produced by the tail rotor.

C. Definition of Model Equations

Once the various components of the model are defined, the equations for all the components must be expressed in a way which minimizes code and the number of parameters. The following does so according to the order of the computer program.

1. Main Rotor Thrust and Induced Velocity

The computation of thrust and induced velocity is based on a classical momentum theory equation, but with a special recursion scheme which yields a very quick convergence. The block diagram showing the thrust and induced velocity equations is given in Figure 3.

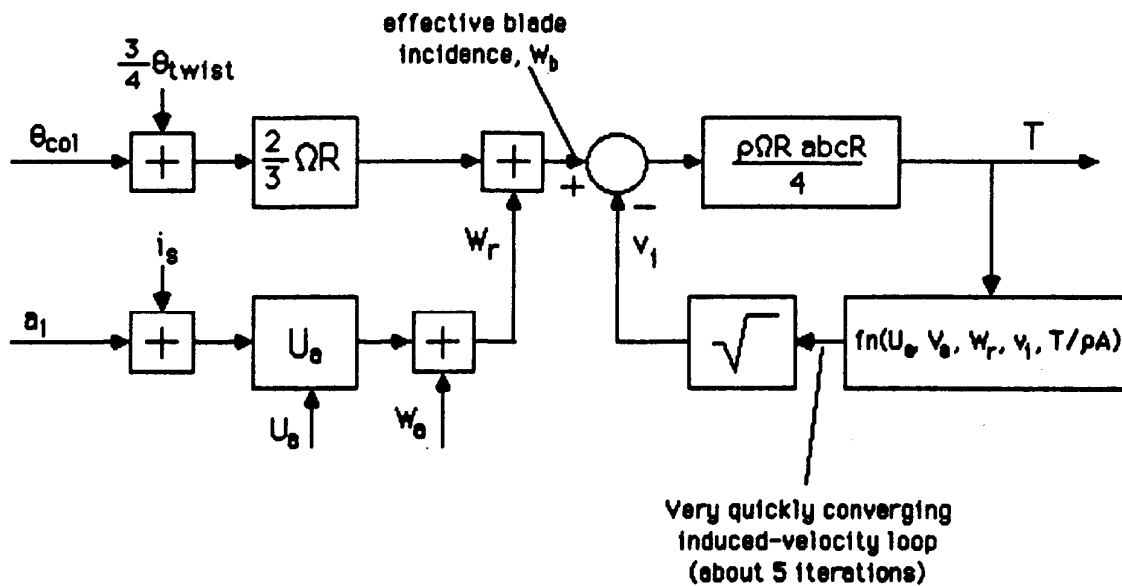


Figure 3. Main Rotor Thrust and Induced-Velocity Block Diagram.

The recursion relationship is based on breaking the thrust-induced velocity loop at the induced-velocity node and iterating on a solution for thrust followed by induced-velocity. This yields a fast convergence with a fixed number of iterations—about 5 is sufficient.

$$T = (W_b - v_i) \frac{R abcR}{4}$$

$$v_i^2 = \frac{\hat{v}^2}{2} + \frac{T^2}{2A} - \frac{\hat{v}^2}{2}$$

where

$$W_r = W_a + (a_1 + i_s) U_a - b_1 V_a$$

$$W_b = W_r + \frac{2}{3} R [\text{col} + \frac{3}{4} \text{twist}]$$

$$\hat{v}^2 = U_a^2 + V_a^2 + W_r(W_r - 2v_i)$$

$$A = \pi R^2$$

Once induced velocity for the main rotor has been computed, one can compute the longitudinal and lateral dihedral effects of the main rotor which are, in turn, dependent on induced velocity:

$$db_1/dv = da_1/du =$$

The main rotor parameters needed for these equations are:

d^{mr} , horizontal distance of hub from c. g.

h^{mr} , hub height above the c. g.

R, rotor radius.

abcR, product of lift slope, number of blades, chord, and radius.

, effective blade twist.

, main rotor angular rate.

2. Tail Rotor Thrust and Induced-Velocity

Thrust and induced velocity for the tail rotor is computed in the same manner as for the main rotor except that no flapping effects are included.

The parameters which define the tail rotor effects are:

d^{tr} , distance of tail rotor from c. g.

h^{tr} , height of tail rotor above c. g.

R^{tr}

$(abcR)^{tr}$, product of lift slope, number of blades, chord, and radius.

ω^{tr} , tail rotor angular rate.

3. Fuselage Geometry and Drag

Profile drag forces are computed for the fuselage in the x-, y-, and z-axes. These drag forces can constitute a significant portion of the overall power required and thus must be computed prior to main rotor torque. The forces are computed at the center of pressure located at the point (X.FUS, Y.FUS, Z.FUS) relative to the center of gravity.

Fuselage drag forces are computed using a "quadratic aerodynamic form." In this case forces are expressed as a summation of terms formed by the product of translational velocity components in each axis. The constants in each term are the effective flat plate drag.

$W_o^{fus} \triangleq W_o + V_i$	local w-velocity
$X_{aero}^{fus} = \frac{\rho}{2} X_{uu}^{fus} U_o \cdot U_o$	drag component
$Y_{aero}^{fus} = \frac{\rho}{2} Y_{vv}^{fus} V_o \cdot V_o$	side-force component
$Z_{aero}^{fus} = \frac{\rho}{2} Z_{ww}^{fus} W_o^{fus} \cdot W_o^{fus}$	downwash component

Moments due to the drag forces relative to the center of gravity are computed.

The parameters required for the fuselage are:

d^{fus} , distance of fuselage a. c. from c. g.

h^{fus} , height of fuselage a. c. from c. g.

X_{uu}^{fus} , effective flat plate drag in x-axis

Y_{vv}^{fus} , effective flat plate drag in y-axis

Z_{ww}^{fus} , effective flat plate drag in z-axis

4. Horizontal Tail Geometry and Lift

The horizontal tail is modeled in terms of a quadratic aerodynamic form for airfoils.

The first step in computing the lift on the horizontal tail is to determine whether the surface is immersed in the rotor downwash field. This will influence the local vertical velocity vector.

The next step is to check for aerodynamic stall by comparing the force computed above with the maximum achievable at the same airspeed.

$$W_0^{mt} \triangleq W_0 + v_i \quad \text{local w-velocity}$$

$$Z_{aero}^{mt} = \frac{\rho}{2} (Z_{uu}^{mt} U_0 U_0 + Z_{uv}^{mt} U_0 W_0^{mt}) \quad \text{normal force}$$

$$> \frac{\rho}{2} Z_{min}^{mt} U_0 U_0 \quad \text{stall condition}$$

Pitching moment due to the horizontal tail is computed based on the location of the aerodynamic center relative to the center of gravity.

The parameters required for horizontal tail effects are:

d^{ht} , distance of horizontal tail from c. g.

h^{ht} , height of horizontal tail from c. g.

Z_{uu}^{ht} , aerodynamic camber effect

Z_{uw}^{ht} , lift slope effect

Z_{min}^{ht} , stall effect

5. Wing Geometry and Lift

The wing is treated in the same manner as the horizontal tail. It is first checked for exposure to main rotor downwash and then for stall. For the wing, induced drag is computed in order to determine the power loss due to this effect. Lift and pitching moment for the wing are also computed.

$W_a^{wng} \triangleq W_a + v_i$	local w-velocity
$Z_{zero}^{wng} = \frac{\rho}{2} (Z_{uu}^{wng} U_a U_a + Z_{uw}^{wng} U_a W_a^{wng})$	normal force
$> \frac{\rho}{2} Z_{min}^{wng} U_a U_a$	stall condition

The power due to the induced drag of the wing is computed based on the product of force and velocity in the x-axis.

The parameters required for wing effects are:

d^{wng} , distance of wing from c. g.

h^{wng} , height of wing from c. g.

Z_{uu}^{wng} , aerodynamic camber effect

Z_{uw}^{wng} , lift slope effect

Z_{min}^{wng} , stall effect

6. Vertical Tail Geometry and Lift

The vertical tail is treated the same as the other lifting surfaces except that it is assumed out of main rotor downwash. Sidewash from the tail rotor is neglected.

$V_o^{vt} \triangleq V_o + V_i^{tr}$	local v-velocity
$Y_{aero}^{vt} = \frac{\rho}{2} (Y_{uu}^{vt} U_o U_o + Y_{uv}^{vt} U_o V_o^{vt})$	normal force
$> \frac{\rho}{2} Y_{min}^{vt} U_o U_o$	stall condition

The parameters required for vertical tail effects are:

d^{vt} , distance of vertical tail from c. g.

h^{vt} , height of vertical tail from c. g.

Y_{uu}^{vt} , aerodynamic camber effect

Y_{uv}^{vt} , lift slope effect

Y_{min}^{vt} , stall effect

7. Total Power Required

Total power due to the main rotor, tail rotor, wing, and miscellaneous effects are summed giving the total power output by the engine.

$$\text{Total power required} = P^{\text{mr}} + P^{\text{tr}} + P^{\text{fus}} + P^{\text{wng}} + P^{\text{climb}}$$

$$P^{\text{mr}} = P_{\text{induced}}^{\text{mr}} + P_{\text{profile}}^{\text{mr}} + P_{\text{accessories}}^{\text{mr}}$$

(Note: An estimate of power required for accessories can be found in Reference 9.)

$$P_{\text{induced}}^{\text{mr}} =$$

$$P_{\text{profile}}^{\text{mr}} =$$

$$P^{\text{tr}} = P_{\text{induced}}^{\text{tr}} =$$

$$P^{\text{fus}} = | X_{\text{fus}} U_a | + | Y_{\text{fus}} V_a | + | Z_{\text{fus}} (W_a - v_i) |$$

$$P^{\text{wng}} =$$

$$P^{\text{climb}} = m g \dot{h}$$

8. Summation of Force and Moment Equations

The first order effects of all components are summed in three force equations and three moments equations. The force due to gravity rotated through theta and phi are also included here:

$$X =$$

$$Y =$$

$$Z =$$

$$L =$$

M =

N =

The equations of motion are expressed in terms of body-axis accelerations so that they may be directly integrated.

9. Integration and Axis Transformation

As discussed in Reference 10 the algorithm used for numerical integration of states should be carefully chosen to minimize digital effects.

The body accelerations are integrated using a second order Adams method:

$$v_{n+1} = v_n + DT (1.5 a_n - 0.5 a_{n-1})$$

These body velocities are then converted to earth relative velocities using a common Euler angle direction cosine transformation.

Finally, the earth velocities are integrated to obtain earth positions using a trapezoidal integration method:

$$x_{n+1} = x_n + DT (0.5 v_n + 0.5 v_{n-1})$$

10. Summary of Model Parameters

A summary of all the parameters included in this model are given below according to each model component:

1. Main rotor

FS.HUB	Fuselage station of hub
WL.HUB	Water line location of hub
IS	Forward tilt of rotor shaft w.r.t. fuselage
GAM.OM.16	Lock number * omega / 16
R.MR	Radius of main rotor
RPM.MR	RPM of main rotor
CDO	Blade profile drag coefficient
DM.DA1	Incremental rotor stiffness factor (Hinge offset and spring stiffness of rotor)
A	Blade lift curve slope
B	Number of blades
C	Blade chord

2. Fuselage

FS.FUS	Fuselage station of fuselage center of pressure
WL.FUS	Waterline station of fuselage center of pressure
XUU.FUS	Aerodynamic quadratic model constant
YUU.FUS	" " " "
ZUU.FUS	" " " "

3. Tail rotor

FS.TR	Fuselage station of tail rotor
WL.TR	Waterline station of tail rotor
R.TR	Radius of tail rotor
RPM.TR	RPM of tail rotor
A	Blade lift curve slope
B	Number of blades
C	Blade chord

4. Horizontal tail

FS.HT	Fuselage station of horizontal tail
WL.HT	Waterline station of horizontal tail
ZUU.HT	
ZUW.HT	
ZMAX.HT	Quadratic max lift coeff of horizontal tail

5. Wing

FS.WN	Fuselage station of wing
WL.WN	Waterline station of wing
ZUU.WN	
ZUW.WN	
ZMAX.WN	Quadratic max lift coeff of wing

6. Vertical tail

FS.VT	Fuselage station of vertical tail
WL.VT	Waterline station of vertical tail
YUU.VT	
YUV.VT	
YMAX.VT	Quadratic max lift coeff of vertical tail

III. Model Matching and Estimation Procedures

In order to demonstrate model matching and estimation procedures, a model of the Bell AH-1S Cobra is developed. The actual code for this example version along with a list of symbols and a table of associated input parameters are presented in Appendices A, B, and C.

The primary sources which are used in this example are the flight manual (Reference 11), a manufacturer's stability and control package (Reference 12), a volume of Jane's (Reference 13), and a flight dynamics data report (Reference 14). Other useful references include the USAF Stability and Control Datcom (Reference 15), the U. S. Army Engineering Design Handbook (Reference 16) and the previously cited Stepniewski and Keyes reference.

In this section, we will describe the individual components of the AH-1S and how each of the associated parameters were determined. There are 44 total parameters needed for this model. 22 of these are simple geometrical variables which can be easily obtained from a scale drawings, from aircraft manuals, or even estimated from a picture of the aircraft.


A. Mass, Loading, and Geometry Data

A substantial portion of the data required are either directly obtainable geometric data or are common mass and mass-loading data.

1. Geometric Data

Geometric parameters are easily obtained from aircraft drawings or reference literature. Figure 4, taken from the flight manual, provides a basis for geometric information. Note that positions of all major components are given relative to the manufacturer's reference system (fuselage stations, waterlines, and buttlines).

Explicit positions can be obtained for some features such as main rotor hub position and tail rotor hub. For airfoils it is generally sufficient to estimate and use the positions for one-quarter mean aerodynamic chord. The fuselage aerodynamic center is less clearly defined and must be estimated depending upon the shape. Appendages such as tail boom and landing gear can be considered in estimating the fuselage aerodynamic center.

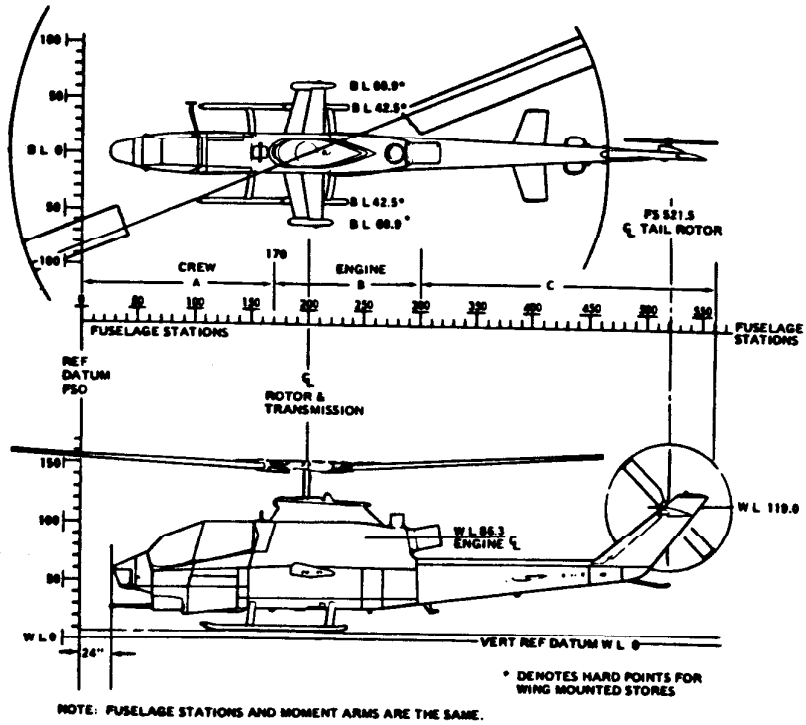

209900-817A

Figure 8-1. Helicopter Station Diagram

8-2

COMPONENT	FS	WL
Main rotor hub	200	153
Tail rotor hub	521	119
Fuselage		
Wing		
Horizontal tail		
Vertical tail		

Figure 4. Basis for Geometric Data.

2. Mass and Loading Data

Values for normal operating gross weight and center of gravity are typically obtained from operating manuals. An example is shown in Figure 5. Specific choices will depend upon the general loading condition of interest. Here an intermediate loading is chosen which also corresponds to other available data.

Inertial data from the Reference 12 stability and control report are given in Table 3. While these do not correspond exactly to the loading chosen above, they can be easily rescaled by assuming a constant radius of gyration in each axis.

EXAMPLE

WANTED


DETERMINE APPROXIMATE CENTER OF GRAVITY FOR KNOWN WEIGHT AND MOMENT

KNOWN

GROSS WEIGHT = 9200 POUNDS
MOMENT/100 = 18150 INCH-POUNDS

METHOD

MOVE RIGHT FROM 9200 POUNDS TO APPROXIMATE MIDPOINT BETWEEN 18100 AND 18200 IN-LB DIAGONAL LINES FROM THIS POINT MOVE DOWN TO READ 187.4 ON CENTER OF GRAVITY SCALE

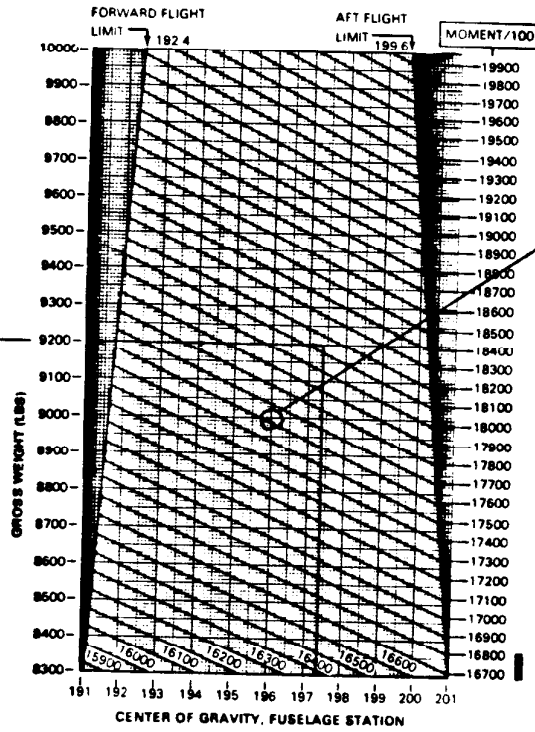

Representative weight and cg chosen from flight manual operating envelope. (9000 lb, FS 196)

209900-489-1G

Figure 6-9. Center of Gravity Limits Chart (Sheet 1 of 2)

6-17

Figure 5. Basis for Loading Data.

Table 3. Basis for Inertial Data

699-099-012

SUMMARY

TOTAL HELICOPTER MOMENTS OF INERTIA ABOUT HELICOPTER C.G.

<u>Condition</u>	<u>Weight (lbs.)</u>	<u>\bar{x} (in.)</u>	<u>\bar{z} (in.)</u>	<u>Moment of Inertia (Slug - Ft²)</u>			<u>Principal Axis (Nose Down Angle)</u>
				<u>Roll</u>	<u>Pitch</u>	<u>Yaw</u>	
(1) Weight Empty	5571.4	204	82	1990.4	10592.7	8878.2	
(2) Basic	8673.2	193	71	2843.0	13115.6	11264.0	6° 30'
(3) Hog	9501.1	194	68	4002.5	13082.3	11930.4	6° 37'
(4) Scout	9296.9	194	70	3195.3	13233.1	11606.7	6° 29'
(5) Most Forward	6606.2	191	78	2255.5	12462.4	10499.5	7° 19'
(6) Most Aft	7476.8	200	75	2265.6	11881.0	9903.8	4° 18'

(b) HELICOPTER COMPANY

Use of data hereof is subject to the restrictions on the title page.

A-11

B. Propulsion Data

Required propulsion data include power available for given operating conditions. These data can be found in Jane's under the appropriate propulsion system manufacturer as illustrated in Table 4. The specific information of interest here is the maximum continuous power rating for the AVCO Lycoming T53-L-703 gas turbine engine.

Other information needed consists of an approximate breakdown of power, including that due to accessories. Data from the Stepniewski and Keyes source are given in Table 5. These data will be used to estimate power losses from the computed power required by each of the components listed previously.

The basis for torque (power) available under various operating conditions is given in Figure 6. (Percent torque is assumed equal to percent power for the normal operating rpm--324 in this case.)

Table 4. Basis for Propulsion System Data.

AVCO LYCOMING GAS TURBINE ENGINES								
Manufacturer's and civil designation	Military designation	Type *	T-O Rating kN (lb st) or max kW (hp)	SFC μg/J; † mg/Ns (lb/h/hp; ‡lb/h/lb st)	Weight dry less tailpipe kg (lb)	Max dia mm (in)	Length overall mm (in)	Remarks
T5313B	—	ACFS	1,044 kW (1,400 shp)	98 (0-58)	245 (540)	584 (23)	1,209 (47-6)	Powers Bell 205A
T5317A	—	ACFS	1,119 kW (1,500 shp)	99-7 (0-59)	256 (564)	584 (23)	1,209 (47-6)	Based on T5319A
T5311A	—	ACFS	820 kW (1,100 shp)	115 (0-68)	225 (496)	584 (23)	1,209 (47-6)	Bell 204B
—	T53-L-13B	ACFS	1,044 kW (1,400 shp)	98 (0-58)	245 (540)	584 (23)	1,209 (47-6)	Advanced UH-1H, AH-1G
—	T53-L-703	ACFS	1,106 kW (1,485 shp)	101-4 (0-60)	247 (545)	584 (23)	1,209 (47-6)	Bell AH-1Q, AH-1S TOW/Cobra
LTC1K-4K	—	ACFS	1,157 kW (1,550 shp)	98-7 (0-584)	234 (515)	584 (23)	1,209 (47-6)	Bell XV-15
—	T53-L-701	ACFP	1,082 kW (1,451 shp)	101-4 (0-60)	312 (688)	584 (23)	1,483 (58-4)	Grumman OV-1D
—	YT55-L-9	ACFP	1,887 kW (2,529 shp)	102-7 (0-608)	363 (799)	615 (24-2)	1,580 (62-2)	Piper Enforcer
—	T55-L-7C	ACFS	2,125 kW (2,850 shp)	101-4 (0-60)	267 (590)	615 (24-2)	1,118 (44)	Boeing CH-47B, Bell 214A
T5508D (LTC4B-8D)	—	ACFS	2,186 kW (2,930 shp)	100-1 (0-592)	274 (605)	610 (24)	1,118 (44)	Bell 214A, 214B
—	—	—	flat-rated to 1,678 kW (2,250 shp)	106-0 (0-628)	—	—	—	—
—	T55-L-11A †	ACFS	2,796 kW (3,750 shp)	89-6 (0-53)	322 (710)	615 (24-2)	1,181 (46-5)	Boeing CH-47
LTC4B-12	—	ACFS	3,430 kW (4,600 shp)	86-2 (0-51)	329 (725)	615 (24-2)	1,118 (44)	Improved T55-L-11A
ALF 101	—	ACFF	7-2 kN (1,620 lb)	‡10-19 (‡0-36)	156 (343)	584 (23)	890 (35)	NASA OCGAT
ALF 502R-3	—	ACFF	29-8 kN (6,700 lb)	‡11-64 (‡0-411)	565 (1,245)	1,059 (41-7)	1,443 (56-8)	BAe 146
ALF 502L/L-2	—	ACFF	33-4 kN (7,500 lb)	‡12-1 (‡0-428)	590 (1,298)	1,059 (41-7)	1,487 (58-56)	Canadair CL-600 Challenger

*ACFS = axial plus centrifugal, free-turbine shaft; ACFP = axial plus centrifugal, free-turbine propeller; ACFF = axial plus centrifugal, free-turbine fan
 †Applies to T55-L-11A, C **, D, E ** and 712 **, those designated ** having 2½ min contingency rating of 3,357 kW (4,500 shp).

Table 5. Assumed Breakdown of Power Absorption.

	% total power in hover	% total power max forward
Main rotor induced power	65	15
Main rotor profile power	15	50
Fuselage parasite power	5	25
Tail rotor total power	10	5
Misc. and accessories	5	5

(NOTE: Power losses due to wing stall should also be considered where the effect is suspected to be significant. It will be neglected in this example.

TM 55-1520-236-10



TORQUE AVAILABLE (CONTINUOUS OPERATION)

ENGINE DEICE OFF, ECS OFF

100% RPM JP-4 FUEL

TORQUE AVAILABLE
AM-15
T63-L-703

EXAMPLE

WANTED

INDICATED TORQUE
CALIBRATED TORQUE


KNOWN

PRESSURE ALTITUDE = 7000 FEET
FAT = + 10°C
CALIBRATION FACTOR = 84

METHOD

ENTER PRESSURE ALTITUDE HERE
MOVE RIGHT TO FAT
MOVE DOWN TO CALIBRATION FACTOR
MOVE LEFT, READ INDICATED
TORQUE = 88.0 % Q

FOR CALIBRATED TORQUE
CONTINUE DOWN THRU
CALIBRATION FACTOR, READ
CALIBRATED TORQUE = 84.2 % Q

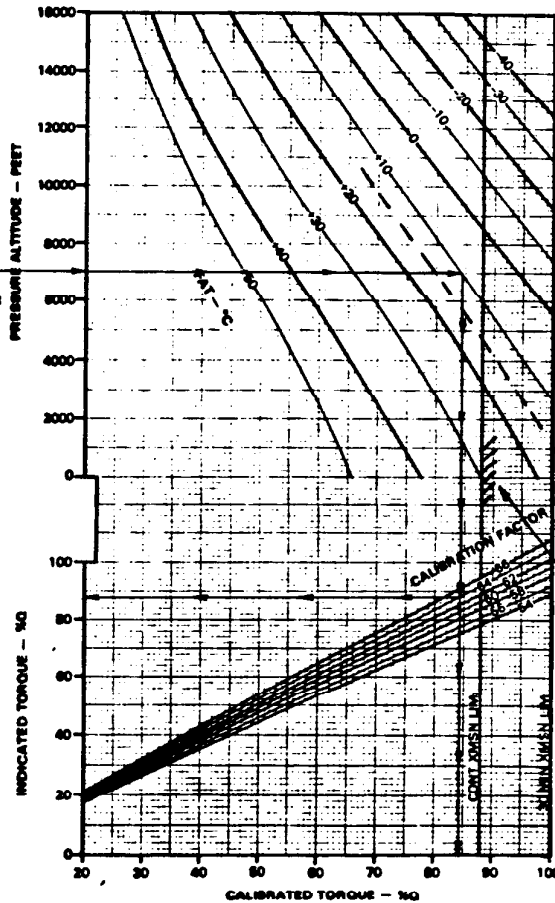

For sea level, std day;
torque is limited by
max continuous
operating condition.
(88%)

DATA BASIS: CALCULATED

7-12

Figure 7-4. Torque available (continuous operation) chart (Sheet 1 of 2)

Figure 6. Basis for Torque (Power) Limits.

C. Rotor Data

Rotor system characteristics consist of geometric, aerodynamic, and operating condition features. Most of the geometric data including size and number of blades and hub center are easily found in flight manuals. Operating conditions, namely the normal operating rpm, are likewise obtained.

The main aerodynamic parameters include the effective section lift curve slope and profile drag coefficient. Commonly accepted values of 5.7 and .006, respectively, are sufficient starting points.

The most crucial rotor parameters, however, are those relating to the effective flapping stiffness or hinge offset. These data are generally found only in manufacturers design reports. Of course in the case of a simple teetering rotor the effective hinge offset is zero. Articulated rotor designs are also fairly easy to represent as long as the geometric hinge offset is known. The most difficult variety to model is the hingeless rotor since both an effective hinge offset and flapping spring must be determined.

Useful auxiliary information for modeling the rotor system is response data which provides direct indication of the unaugmented pitch and roll damping.

D. Aerodynamic Features

Aside from the rotor system aerodynamics, parameters must be estimated for the airfoil and fuselage components. The techniques for doing so are common and require little effort. If manufacturer's stability and control data are available these calculations are trivial. Otherwise, one can refer to estimation handbooks such as the USAF DATCOM (Reference 16).

Airfoil lift parameters involve three main features: camber and incidence, circulation lift, and stall. The first two are highly dependent upon geometry and the third on maximum lifting performance.

Relationships which are needed for setting parameters involve the quadratic aerodynamic parameters and the more common non-dimensional aerodynamic coefficients. These are given below for use in the estimation procedures described in Figure 7. The equations are for the horizontal tail, but the other airfoil surfaces are similar.

Estimates typical for airfoils:

$z_{uu}^{ht} = -s^{ht} C_{L_0}^{ht}$; C_{L_0} is set by both camber and incidence of the airfoil.

$z_{uw}^{ht} = -s^{ht} C_{L_\alpha}^{ht}$; note that $C_{L_\alpha} \approx \frac{2\pi R}{R+2}$

$z_{min}^{ht} = -s^{ht} C_{L_{max}}^{ht}$; typical values are 1.5 to 3 depending upon R .

Similarly, fuselage drag estimates can be made for each of the three axes using available drag data.

Estimates typical for fuselage drag:

$$X_{uu}^{fus} = -S^{fus} C_D$$

where S^{fus} is PROJECTED FRONTAL AREA

C_D CAN BE ESTIMATED USING NUMEROUS
TEXTBOOK TABULATIONS OF 3-d DRAG.
THIS WILL VARY FOR EACH AXIS.

WING:
 span = 10.75 (based on $i_w = 14^\circ$)
 chord = 3.0 $C_{ho} = 1.2$
 area = 32.25 ASSUME $C_{MAX} = 2$
 AR = 3
 $CL_0 = \frac{2\pi R}{R+2} = 5$

HORIZONTAL TAIL:
 span = 7
 chord = 2.25
 area = 16
 AR = 3
 $CL_0 = 5$

VERTICAL TAIL:
 span = 5
 chord = 3.3
 area = 17
 AR = 1.5
 $CL_0 = 2.7$
 (ASSUME $C_{MAX} = 3$)

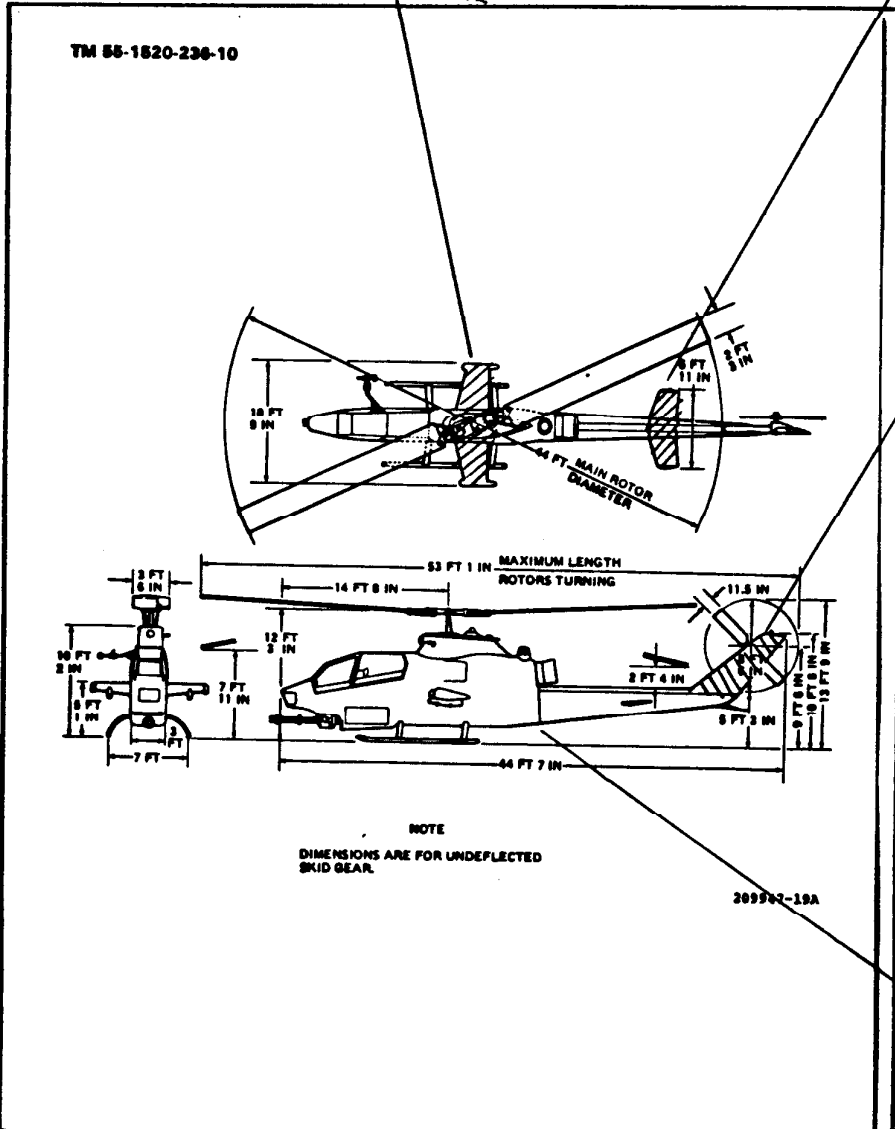


Figure 2-2. Principal Dimensions (Typical)

FUSELAGE:

ASSUMED DRAG COEFFICIENTS:
 FRONT .2
 SIDE 2.0
 UP .7

2-4

Figure 7. Basis for Initial Estimates of Aerodynamic Parameters.

E. Hover Performance

The parameters listed above provide a starting point for the math model. Additional flight manual and available flight data will serve to make refinements in model response and performance characteristics.

The first adjustment of model parameters can be made based on the flight manual hover performance as shown in Figure 8. Here the percent maximum torque is given for a specific hover condition.

The factors which can be adjusted to achieve a good match are the power losses due to accessories, downwash on the fuselage and horizontal airfoils, or main rotor induced velocity factor (if included).

HOVER
 ALL CONFIGURATIONS 100% RPM
 LEVEL SURFACE CALM WIND

HOVER
 AH-1H
 T53-L-703

EXAMPLE

WANTED

TORQUE REQUIRED TO HOVER


KNOWN

PRESSURE ALTITUDE = 11000 FEET
 FAT = 0°C
 GROSS WEIGHT = 8500 LB
 DESIRED SKID HEIGHT = 2 FEET

METHOD

ENTER PRESSURE ALTITUDE HERE
 MOVE RIGHT TO FAT
 MOVE DOWN TO GROSS WEIGHT
 MOVE LEFT TO SKID HEIGHT
 MOVE DOWN READ TORQUE REQUIRED
 TO HOVER = 72.5%

Torque req'd
 for OGE hover.
 (1232 hp)

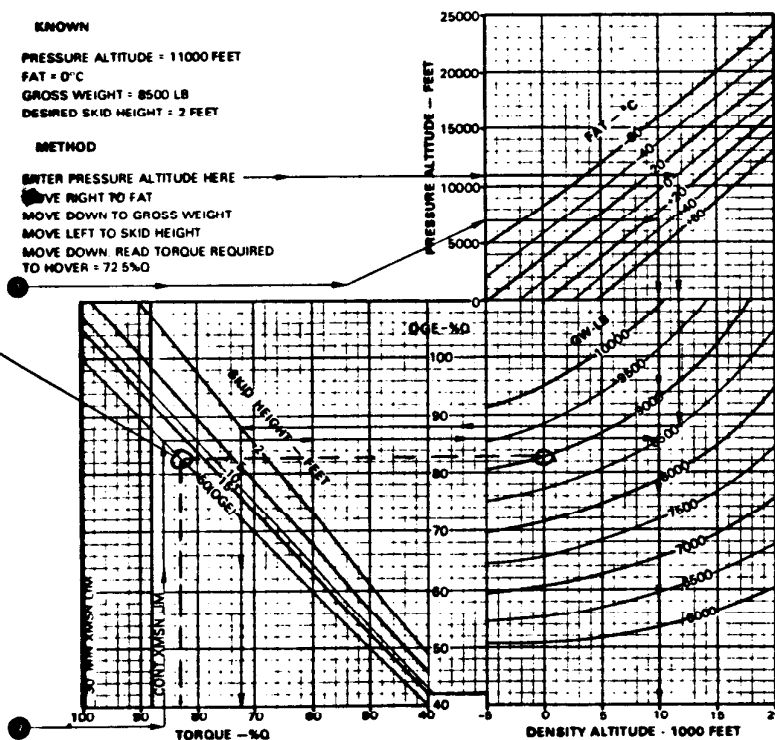

DATA BASIS - DERIVED FROM FLIGHT TEST

B540 Figure 7-5. Hover chart (Sheet 2 of 2)

Figure 8. Basis for Hover Power Required.

F. Forward Flight Data

Up to this point model adjustments have centered on the main rotor system since body drag has been low due to the hover condition. With the consideration of forward flight the fuselage now plays a major role in limiting maximum speed and climb performance.

The main set of data useful for adjusting fuselage drag are given in Figure 9 from the flight manual. Note that the primary information is the torque required as a function of flight condition and loading. The two main features on this plot are the maximum speed at continuous operating torque and the torque and speed for level flight at minimum power.

Additional information is given in Figure 10 with the maximum rate of climb corresponding to an increase in torque.

Finally in Figure 11 data are given for the maximum glide and minimum rate of descent. These are useful for setting the effective full-down collective pitch stop.

TM 85-1520-236-10


CRUISE
PRESSURE ALTITUDE — SEA LEVEL TO 2000 FEET
100% RPM, CLEAN CONFIGURATION, JP-4 FUEL

CRUISE
AH-1B
TS3-L-703

FAT = +15°C

Torque for max
level speed.
(133 kt @ 88%)

Torque and speed
for level flight at
min power.
(64 kt @ 46%)

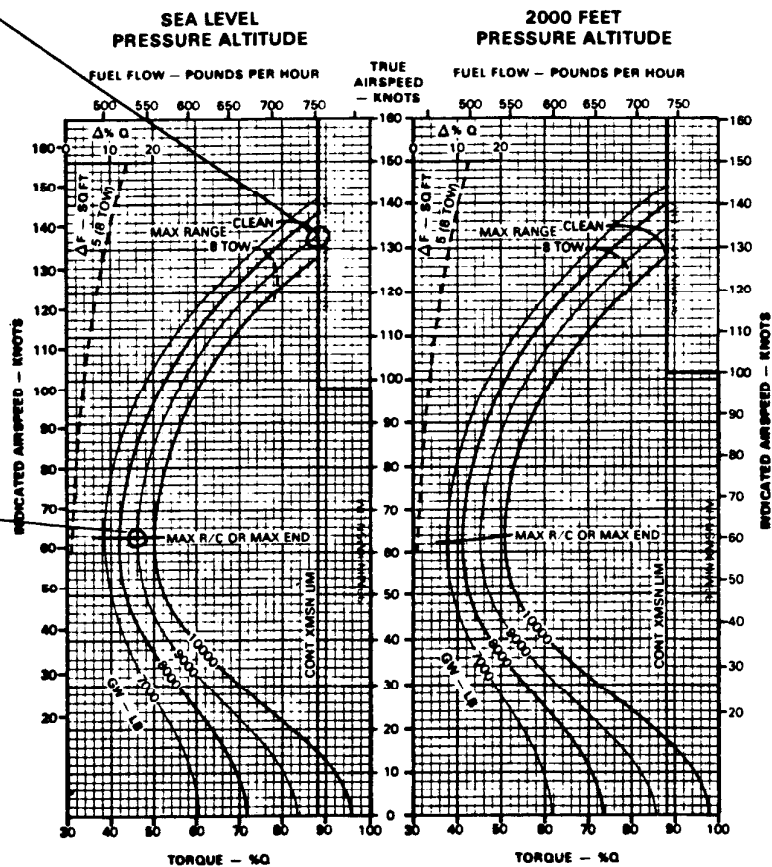

DATA BASIS: DERIVED FROM FLIGHT TEST

85410 Figure 7-7. Cruise Chart (Sheet 14 of 23)

7-34

Figure 9. Basis for Forward Flight Speeds and Power Required.

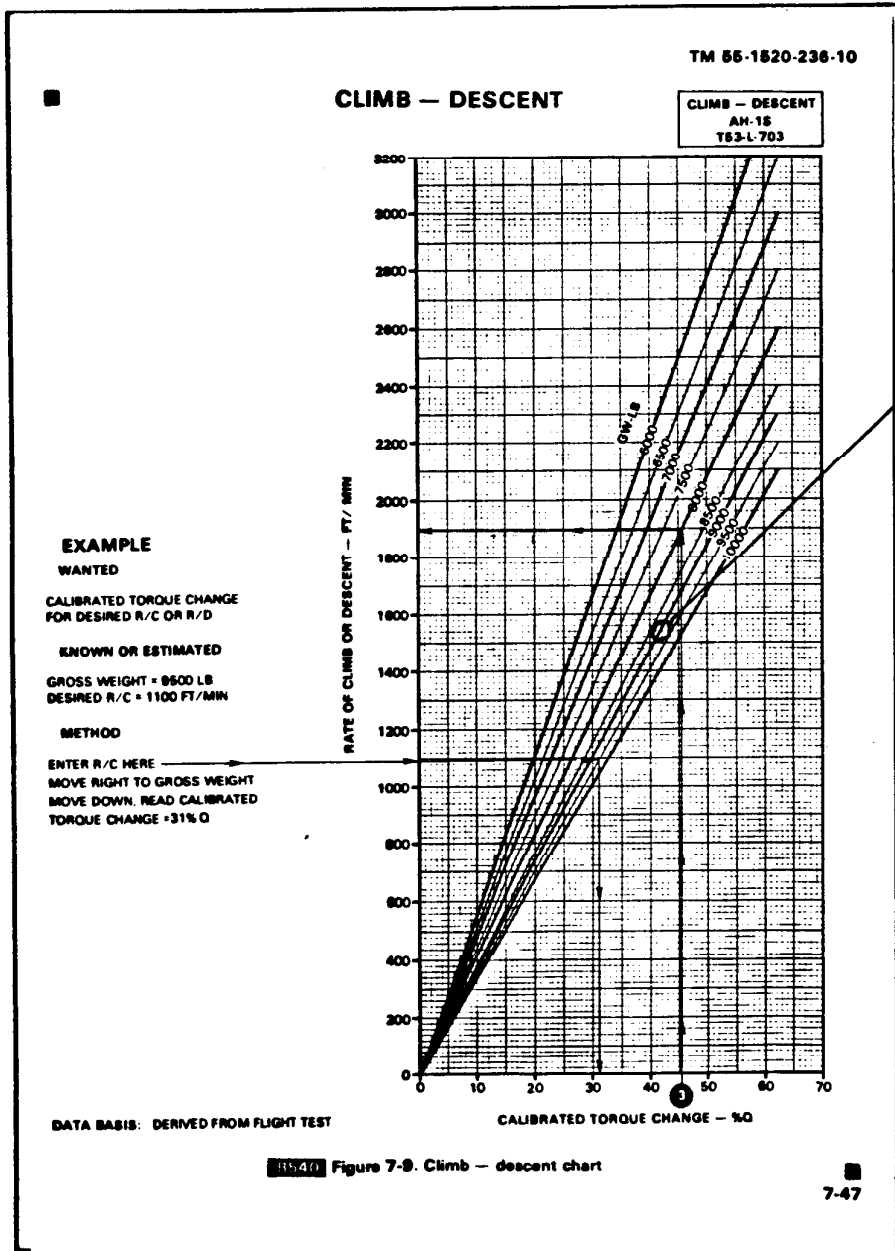


Figure 10. Basis for Max Rate of Climb Speed and Power Required.

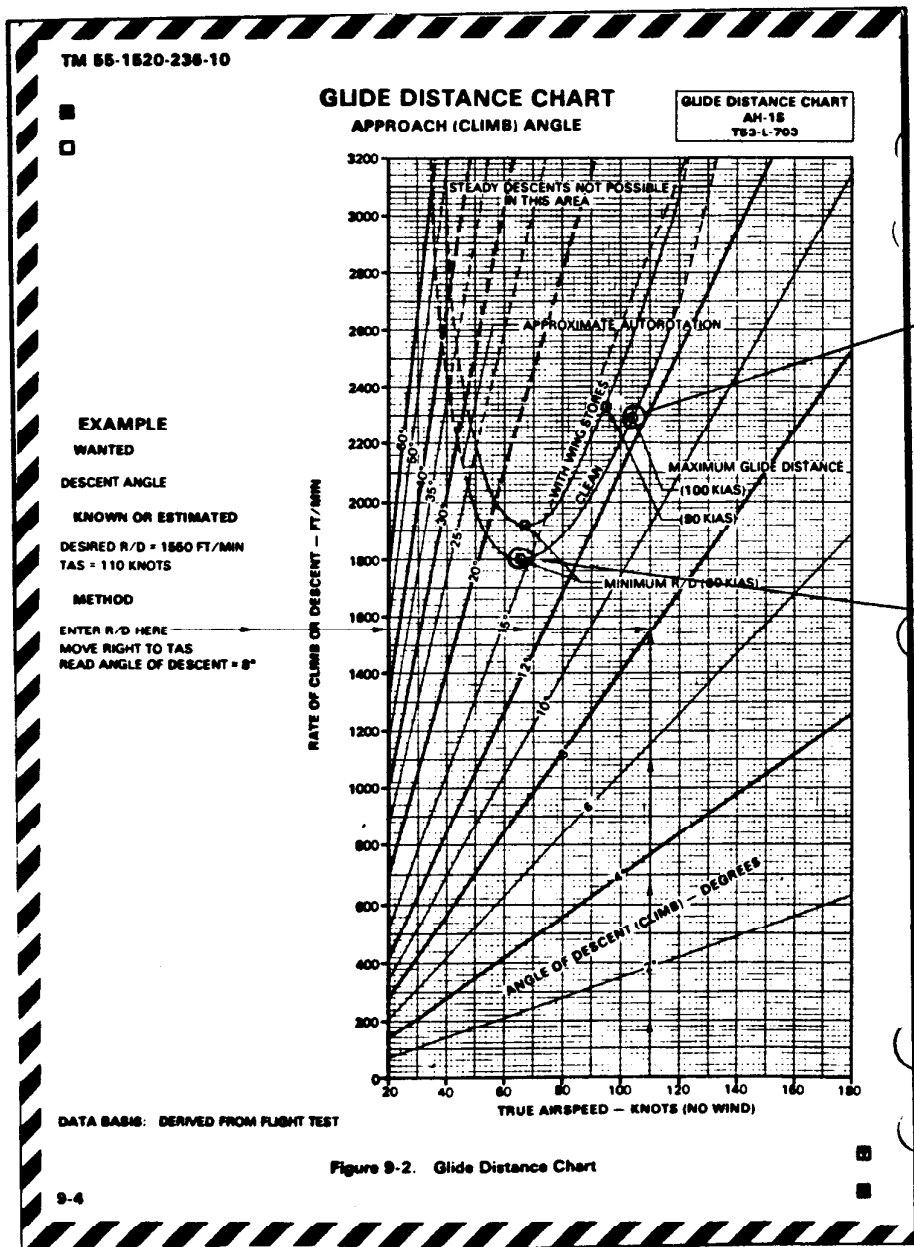


Figure 11. Basis for Max Glide Speed and Descent Angle.

As a final note, the process of tuning model parameters should not be done without careful consideration of all secondary effects. The best policy is to avoid making anything other than simple direct first-principles corrections. There is substantial redundancy in some of the data shown here and it is not possible to achieve perfect matches in all respects. One needs to exercise judgement in where a reasonable match has been attained and should be accepted as adequate.

IV. Checkout Procedures

A. General

As discussed earlier, model complexity can hamper the thoroughness of simulator computer program implementation and checking. However, the model presented here can be fully checked with reasonable effort. This is due to the fewness of model constants, fewness of degrees of freedom, and minimal program branching. The recommended checking procedure involves the following elements:

- o Use of an independent operating program.
- o Verification of trim points.
- o Verification of state transitions through n steps.
- o Overlay of time histories.
- o Identification of dominant response modes.

Some of these steps are redundant but nevertheless serve to build confidence in the correctness of the math model implementation at only minimal added cost. The following is a brief discussion of each element.

B. Discussion of Checkout Procedure Elements

1. Independent Operating Program

As a general rule, math model checkout should be accomplished using an independent implementation and check source. Furthermore, not only should an independent program be used but also an independent computer.

This math model form enables the user to develop a math model version on a small desktop microcomputer and run complete sets of check cases well in advance of using the simulator computer facilities.

The specific computer system used to develop and run this math model consisted of a Compaq 286 desktop computer with 640K working memory running Microsoft Basic. Only an interpreter mode was used although a Basic compiler is available. The interpreter permits a highly efficient interaction between the model developer and the computer system.

2. Trim Point Verification

A check of static trim points gives an initial indication of correct model implementation. The full operating envelope can be covered with just a few cases and possible discrepancies isolated to airspeed, vertical velocity, or controls. A cursory check of suspected parameters or component equations can usually lead to simple corrections. Trim solutions should be correct prior to proceeding to the next item.

A sample of the trim solution printout is given in Figure 12. This same format is displayed during the trimming process so that one can observe whether there are difficulties in iterating on a solution.

```
TRIM CALCULATIONS

Pdot = 1.68E-01  DC = 0.1
Bdot = -7.82E-03  a1 = 0.6
Rdot = 4.44E-02  b1 = -1.3
Udot = -9.73E-04  DTR = 6.83E-02
Vdot = -4.05E-03  Theta = -3.1
Wdot = 3.84E-03  Phi = -1.02E+00
aldot = -2.59E-02  B1 = -1.19E+00
bidot = 2.55E-01  A1 = -1.31E+00
Q = 9.80E+03  HP = 734
Vi = 11.9  Thrust = 8803
Vi.tr = 13.2  T.tr = 363
VB(1) = 1.01E+02  Xdot = 1.01E+02
VB(2) = 0.00E+00  Hdot = 0.0
VB(3) = -5.55E+00  Gamma = 0.00E+00

VT = 60.0

Trimmed: Hit RETURN to continue

in D.W.?  Stall condition.
-----  -----
-  Vert. tail O.K.
1  Hor. tail O.K.
0  Wing O.K.
```

Figure 12. Sample of Trim Point Printout.

3. State Transition Verification

Given that static solutions are valid, the dynamic response characteristics should be examined next. Correct operation is indicated by tracking several discrete state variable transitions and comparing with independently obtained check values. This is made feasible by restricting the number of degrees of freedom and levels of numerical integration. For example, only about six transitions for each control variable are needed to excite each term in the model equations.

In order to thoroughly check state transitions, a table overlay is recommended. This is accomplished by duplicating the state transition printout format of the checkout computer with that of the simulator computer. The original checks can be printed on transparencies then directly overlaid with the simulator printout.

Examples of the state transition checks are given in Table 6.

10-10-1986

CONFIGURATION: 101
 HELICOPTER : AH-1S
 WEIGHT : 9000
 ST : .01
 CONTROL DC(2) STEP INPUT = 5 DEGREES
 NOTE: All angle units are degrees

Horizontal tail B.W. condition toggled

Table 6. Sample of State Transition Checks.

TIME	DC(1)	DC(2)	DC(3)	DC(4)	VA(1)	VA(2)	VA(3)	VA(4)	VA(5)	VA(6)	VB(1)	VB(2)	VB(3)	VB(4)	VB(5)	VE(1)
0.0000	5.9270	3.6940	-1.1911	3.9146	101.117	0.000	-5.545	0.000	0.000	0.000	101.117	0.000	-5.545	0.000	0.000	101.252
0.0100	5.9270	3.6940	-1.1911	3.9146	101.117	0.000	-5.545	0.000	0.000	0.000	101.117	-0.000	-5.551	0.003	-0.117	101.253
0.0200	5.9270	3.6940	-1.1911	3.9146	101.117	-0.000	-5.551	0.003	-0.117	0.000	101.116	0.003	-5.558	0.109	-0.194	101.253
0.0300	5.9270	3.6940	-1.1911	3.9146	101.116	0.003	-5.558	0.109	-0.194	-0.000	101.116	0.009	-5.565	0.382	-0.271	101.253
0.0400	5.9270	3.6940	-1.1911	3.9146	101.116	0.009	-5.566	0.382	-0.271	-0.003	101.116	0.018	-5.576	0.769	-0.348	101.254
0.0500	5.9270	3.6940	-1.1911	3.9146	101.116	0.018	-5.576	0.769	-0.348	-0.006	101.116	0.029	-5.586	1.252	-0.425	101.254
0.0600	5.9270	3.6940	-1.1911	3.9146	101.116	0.029	-5.586	1.252	-0.425	-0.010	101.115	0.042	-5.598	1.818	-0.501	101.254
0.0700	5.9270	3.6940	-1.1911	3.9146	101.115	0.042	-5.598	1.818	-0.501	-0.013	101.115	0.056	-5.612	2.433	-0.577	101.255
0.0800	5.9270	3.6940	-1.1911	3.9146	101.115	0.056	-5.612	2.433	-0.577	-0.017	101.114	0.072	-5.626	3.147	-0.653	101.256
0.0900	5.9270	3.6940	-1.1911	3.9146	101.114	0.072	-5.626	3.147	-0.653	-0.021	101.114	0.087	-5.642	3.850	-0.728	101.257

Table 6, Concluded.

E(2)	VE(3)	VE(4)	VE(5)	VE(6)	AB(1)	AB(2)	AB(3)	AB(4)	AB(5)	AB(6)	XE(1)	XE(2)	XE(3)	XE(4)	XE(5)	XE(6)	bis	als
.000	0.000	0.000	0.000	0.000	-0.001	-0.004	0.004	0.148	-0.008	0.044	0.000	0.000	0.000	-1.024	-3.139	0.000	0.011	-0.023
.000	0.006	0.002	-0.117	0.003	-0.001	-0.003	-0.404	0.231	-7.784	0.043	1.013	-0.000	0.000	-1.024	-3.139	0.000	0.011	-0.023
.003	0.012	1	-0.194	0.003	-0.012	0.169	-0.608	7.181	-7.738	-0.038	2.025	0.000	0.000	-1.024	-3.141	0.000	0.011	-0.018
.009	0.017	1	-0.271	0.002	-0.018	0.494	-0.743	20.576	-7.737	-0.172	3.038	0.000	0.000	-1.021	-3.143	0.000	0.011	-0.007
.018	0.023	1	-0.348	0.000	-0.025	0.774	-0.874	32.671	-7.710	-0.268	4.050	0.000	0.000	-1.016	-3.146	0.000	0.011	0.003
.030	0.028	1	-0.425	-0.002	-0.032	1.004	-1.003	43.117	-7.678	-0.329	5.063	0.000	0.001	-1.006	-3.150	0.000	0.011	0.011
.042	0.033	3	-0.501	-0.004	-0.038	1.190	-1.129	52.067	-7.643	-0.362	6.075	0.001	0.001	-0.990	-3.155	0.000	0.011	0.018
.056	0.038	2.453	-0.577	-0.007	-0.045	1.339	-1.253	59.695	-7.605	-0.370	7.088	0.001	0.001	-0.969	-3.160	-0.000	0.011	0.024
.071	0.043	3.167	-0.653	-0.010	-0.051	1.454	-1.377	66.156	-7.564	-0.358	8.100	0.002	0.002	-0.941	-3.167	-0.000	0.011	0.029
.087	0.048	3.891	-0.728	-0.012	-0.057	1.561	-1.499	71.590	-7.521	-0.328	9.113	0.003	0.002	-0.906	-3.173	-0.000	0.011	0.034

4. Time History Overlays

In theory the combination of static and state transition checks should be sufficient to demonstrate agreement with the independent model implementation. However, additional confidence is gained by selecting several time history cases to overlay. These can be supplemented by checking dominant response modes based on transfer function solutions from the original independent check model.

Useful time histories to consider are angular rates for both on- and off-axes for a given control input. This checks both the dominant response modes and the amount of off-axis cross coupling. Examples are shown in Figure 13 corresponding to the previous check information.

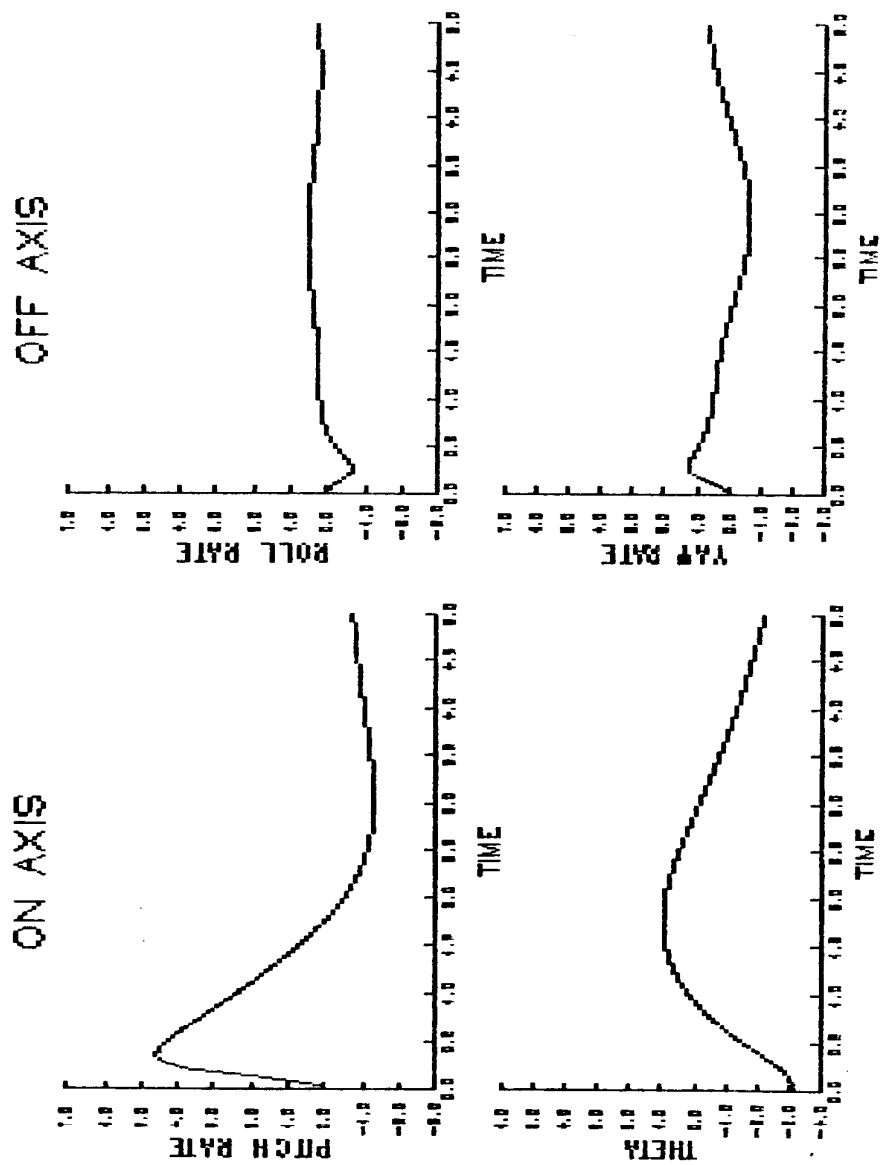


Figure 13. Examples of Time Histories to be Used for Overlays.

5. Dominant Response Identification

It is also useful to supplement the above checks with a comparison of identified dominant response features from the simulator computer with those features observed or computed from the independent checkout version. This is particularly important for handling qualities investigations.

Dominant modes are examined by exciting an axis with the corresponding direct control and scaling the appropriate first- or second-order response features from the respective motion traces. The on-axis traces presented earlier in Figure 13 serve this purpose for extracting short-term pitch repose information.

V. Model Extensions and Refinements

The example which has been presented above can be modified in a number of ways in order to address specific simulation needs. The above math model can be either simplified or made more sophisticated. The following is a discussion of some possible extensions and refinements.

A. Flight Control System

There is no flight control system included in the above model other than conventional aerodynamic interfaces such as cyclic, collective, and tail rotor controls. Addition of a flight control system requires definition of relationships between the cockpit manipulator and the above aerodynamic controls plus any stability and control augmentation systems.

As with the basic airframe math model, definition of flight controls can be done with a wide range of computational complexity. However the same considerations can be applied in order to match the level of complexity with user utility. The main question is to what degree can the simulator pilot observe or be influenced by math model intricacies.

B. Engine-Governor

This aspect of the helicopter math model can be important for tasks involving maneuvering or aggressive control of collective pitch.

The above math model is designed to accommodate an engine-governor system since rotor speed is explicit in the equations. It is necessary only to add appropriate engine governor equations of motion prior to computation of the main rotor thrust.

In general, only a second-order engine governor response is required in order to handle the effective spring-mass-damper action of the main rotor combined with the propulsion system and governor control laws. An adequate model is described in Reference 17.

C. Ground Effect

The modeling of ground effect can be important for tasks involving hover under marginal performance conditions. Again, the computational complexity of such models can vary widely.

It is recommended that, as a first cut, ground effect be modeled as an induced-velocity efficiency factor which primarily affects the power-required to hover. This efficiency factor can be adequately modeled as an exponential function of altitude. The exponential scale height and magnitude is easily quantified from the flight manual hover performance shown earlier in Figure 8.

D. Induced Flow Dynamics

For certain vertical response applications it may be important to model the effective lag in thrust due to a collective pitch change. This is typically a first-order lag in the range of 10 to 15 rad/sec and varies with the sign of the collective pitch change.

This effect can be modeled by setting a first-order lag on the calculation of thrust and induced velocity. Reference 18 can be consulted for guidance in setting values.

E. Higher-Order Flapping, Coning, and Lagging

Higher order rotor system dynamics may be of interest when examining flight control system schemes or certain vibrational effects. However the modes can easily be outside the computational ability of the simulator or highly distorted by the motion system. Thus is crucial for the modeler to analyze computational requirements relative to capabilities.

REFERENCES

- 1 Heffley, R. K., S. M. Bourne, H. C. Curtiss, Jr., W. S. Hindson, and R. A. Hess, Study of Helicopter Roll Control Effectiveness Criteria, NASA CR 117404 (USAAVSCOM TR 85-A-5), April 1986.
- 2 Heffley, R. K., S. M. Bourne, and M. A. Mnich, Helicopter Roll Control Effectiveness Criteria, Manudyne Report 83-2-2, November 1986.
- 3 Talbot, Peter D., Bruce E. Tinling, William A. Decker, and Robert T. N. Chen, A Mathematical Model of a Single Main Rotor Helicopter for Piloted Simulation, NASA TM 84281, September 1982.
- 4 Chen, R. T. N., Effects of Primary Rotor Parameters on Flapping Dynamics, NASA TP-1431, January 1980.
- 5 Glauert, M. A., A General Theory of the Autogyro, Royal Aeronautical Establishment R. and M. No. 1111, November 1926.
- 6 Lock, C. N. H., Further Development of Autogyro Theory, Royal Aeronautical Establishment R. and M. No. 1127, March, 1927.
- 7 Lamb, Horace, "Hydrodynamics," Dover, New York, 1945.
- 8 Monk, Max M., The Aerodynamic Forces on Airship Hulls, National Advisory Committee for Aeronautics Report No. 184, 1924.
- 9 Stepniewski, W. Z. and C. N. Keys, "Rotary-Wing Aerodynamics," Dover, New York, 1984.
- 10 Heffley, R. K., Wayne F. Jewell, Richard F. Whitbeck, and Ted M. Schulman, The Analysis of Delays in Simulator Digital Computing Systems. Volume I, NASA CR-152340, February 1980.
- 11 Anon., Operator's Manual Army Model AH-1S (PROD) AH-1S (ECAS) AH-1S (Modernized Cobra) Helicopters, Department of the Army, TM 55-1520-236-10, 11 January 1980.
- 12 Davis, John M., Stability and Control Data Summaries for the AH-1G and UH-1H Helicopters, Bell Helicopter Report 699-099-012, 9 January 1976.
- 13 Taylor, John W. R., ed., Jane's All the World's Aircraft 1980-81, Jane's Publishing Company Limited, London, 1980.

- 14 Heffley, Robert K., Wayne F. Jewell, John M. Lehman, and Richard A. Van Winkle, A Compilation and Analysis of Helicopter Handling Qualities Data, NASA CR 3144, August 1979.
- 15 Anon., USAF Stability and Control DATCOM, October 1960, revised April 1978.
- 16 Anon., U. S. Army Engineering Design Handbook, Part I, AMCP 706-201, August 1974, and Part II, AMCP 706-202, January 1976.
- 17 Corliss, Lloyd and Chris Blanken, A Simulation Investigation of the Effects of Engine and Thrust Response Characteristics on Helicopter Handling Qualities, NASA TM 85849, October 1983.
- 18 Chen, R. T. N. and William S. Hindson, Influence of Dynamic Inflow on Helicopter Vertical Response, NASA TM 88327, June 1986.

APPENDIX A
BASIC PROGRAM LISTING OF MATH MODEL

```

5930 '
5940 '*****
5950 '
5960 ' DYNAMICS: Dynamics subroutine
5970 '
5980 '*****
5990 '
6000 '   A/C relative to air mass
6010 '
6020   C4 = COS(XE(4)) : S4 = SIN(XE(4))
6030   C5 = COS(XE(5)) : S5 = SIN(XE(5))
6040   C6 = COS(XE(6)) : S6 = SIN(XE(6))
6050 '
6060   VA(1)=VB(1)-(VB(1)*C5)
6070   VA(2)=VB(2)-(VB(2)*C6-VB(1)*S6)
6080   VA(3)=VB(3)-(VB(3)*C5+VB(1)*S5)
6090   VA(4)=VB(4)-VB(4)
6100   VA(5)=VB(5)
6110   VA(6)=VB(6)
6120 '
6130 ' Quadratic States (relative airmass velocities)
6140 '
6150   UU=VA(1)*VA(1) : UV=VA(1)*VA(2) : UW=VA(1)*VA(3)
6160   VV=VA(2)*VA(2) : VW=VA(2)*VA(3) : WW=VA(3)*VA(3)
6170   UP=VA(1)*VA(4) : UQ=VA(1)*VA(5) : UR=VA(1)*VA(6) : MR=VA(3)*VA(6)
6180   VTA=SQR(UU+VV+WW)
6190   IF VA(1)<3! THEN ALPHA.F=XE(5) : GOTO 6210
6200   ALPHA.F=ATN(VA(3)/VA(1))
6210 '
6220 ' Integrate tip path plane angles
6230 '
6240   BV(7)=BV(7) + ST*(A2*F(7)*GAM.DM.16 + B2*AP(7))
6250   BV(8)=BV(8) + ST*(A2*F(8)*GAM.DM.16 + B2*AP(8))
6260   AP(7)=F(7)*GAM.DM.16 : AP(8)=F(8)*GAM.DM.16
6270 '
6280 '***** Main Rotor thrust and induced velocity *****
6290 '
6300 ' Rotor thrust calculation
6310 '
6320 ' Compute z-axis velocity relative to rotor plane (Mr) and blade (Mb):
6330 '
6340   MR = VA(3) + (BV(7) + IS)*VA(1) - BV(8)*VA(2)
6350   MB = MR +2/3*OMEGA.MR*R.MR*(DC(1) + .75*THETA.TWIST)
6360 '
6370 ' Perform iterative solution of thrust and induced velocity
6380 '
6390   FOR I=1 TO 5
6400     THRUST.MR=(MB-VI.MR)*OMEGA.MR*R.MR*RHD*ABC.MR*R.MR/4

```



```

6410     IF THRUST.MR<0 THEN THRUST.MR=0!
6420     VHAT.2=VA(1)^2 + VA(2)^2 + WR*(WR-2*VI.MR)
6430     VI.MR.2=SQR((VHAT.2/2)*(VHAT.2/2)+(THRUST.MR/2/(RHO*PI*R.MR^2))^2) - VHAT.2/2
6440     VI.MR=SQR(ABS(VI.MR.2))
6450     IF VI.MR.2<0 THEN VI.MR=-VI.MR
6460     NEXT I
6470
6480     Compute DA1DU and DB1DV
6490
6500     DB1DV = (B/3)*DC(1)/(OMEGA.MR*R.MR) + 2*(VA(3)-VI.MR)/(OMEGA.MR*R.MR)^2
6510     DA1DU = DB1DV*(1! + (3/2)*VA(1)^2/(OMEGA.MR*R.MR)^2)
6520
6530     ***** Fuselage *****
6540
6550     WA.FUS = VA(3) - VI.MR
6560
6570     X.FUS = SGN(VA(1))*R2*XUU.FUS*UU
6580     Y.FUS = SGN(VA(2))*R2*YVV.FUS*VV
6590     Z.FUS = SGN(WA.FUS)*R2*ZWW.FUS*WA.FUS^2
6600
6610     L.FUS = Y.FUS*H.FUS
6620     M.FUS = Z.FUS*D.FUS - X.FUS*H.FUS
6630     N.FUS = -Y.FUS*D.FUS
6640
6650     ***** Main rotor power and torque *****
6660
6670     P.INDUCED.MR = THRUST.MR*VI.MR*KIND
6680     P.CLIMB = WT*HDDT
6690     P.PARASITE = ABS(X.FUS*VA(1)) + ABS(Y.FUS*VA(2)) + ABS(Z.FUS*WA.FUS)
6700     P.PROFILE.MR = R2*(FR.MR/4)*OMEGA.MR*R.MR*(OMEGA.MR^2*R.MR^2 + 4.6*(UU+VV))
6710     POWER.MR = P.INDUCED.MR + P.CLIMB + P.PARASITE + P.PROFILE.MR
6720     POWER.ROTOR.MR = P.INDUCED.MR + P.PROFILE.MR
6730     POWER.FUS = P.PARASITE
6740     TORQUE.MR = POWER.MR/OMEGA.MR
6750
6760     Compute main rotor force and moment components.
6770
6780     X.MR = -THRUST.MR*SIN(GV(7))
6790     Y.MR = THRUST.MR*SIN(GV(8))
6800     Z.MR = -THRUST.MR*COS(GV(7))*COS(GV(8))
6810
6820     Add DM.DA1 moment contribution to L and M equations.
6830     (DM.DA1 is a combination of spring offset and flapping spring effects)
6840
6850     L.MR = Y.MR*H.HUB + DM.DA1*GV(8)
6860     M.MR = Z.MR*D.HUB - X.MR*H.HUB + DM.DA1*GV(7)
6870     N.MR = -Y.MR*D.HUB + TORQUE.MR
6880
6890     ***** Tail Rotor thrust and induced velocity *****
6900
6910     Rotor thrust calculation
6920
6930     Compute y-axis velocity relative to rotor plane (Wr) and blade (Mb):
6940

```

```

6950 YRTR = -(VA(2) - VA(6)*D.TR + VA(4)*H.TR)
6960 YBTR = YRTR +2/3*OMEGA.TR*R.TR*(DC(4) + .75*THETA.TWIST.TR)
6970 '
6980 ' Perform iterative solution of thrust and induced velocity
6990 '
7000 FOR I=1 TO 20
7010 THRUST.TR=(YBTR-VI.TR)*OMEGA.TR*R.TR*RHO*ABC.TR*R.TR/4
7020 IF THRUST.TR<0 THEN THRUST.TR=0!
7030 VHAT.2=(VA(3)+VA(5)*D.TR)^2 + VA(1)^2 + YRTR*(YRTR-2*VI.TR)
7040 VI.TR.2=SQR((VHAT.2/2)*(VHAT.2/2)+(THRUST.TR/2/(RHO*PI*R.TR^2))^2) - VHAT.2/2
7050 VI.TR=SQR(ABS(VI.TR.2))
7060 IF VI.TR.2<0 THEN VI.TR=-VI.TR
7070 NEXT I
7080 '
7090 ' ***** Tail rotor power and torque *****
7100 '
7110 P.INDUCED.TR = THRUST.TR*VI.TR*KIND
7120 P.PROFILE.TR = R2*(FR.TR/4)*OMEGA.TR*R.TR*(OMEGA.TR^2*R.TR^2 + 4.6*(UU+(VA(3)+VA(5)*D.TR)^2))
7130 POWER.TR = P.INDUCED.TR + P.PROFILE.TR
7140 TORQUE.TR = POWER.TR/OMEGA.TR
7150 '
7160 ' Compute tail rotor force and moment components.
7170 '
7180 Y.TR = THRUST.TR
7190 '
7200 L.TR = Y.TR*H.TR
7210 M.TR = -TORQUE.TR
7220 N.TR = -Y.TR*D.TR
7230 '
7240 ' ***** Horizontal tail *****
7250 '
7260 ' Check if horizontal tail is in main rotor downwash
7270 ' Compute aerodynamic force on tail
7280 '
7290 IF VA(1)<2! THEN EPSILON.HT=1 : GOTO 7330
7300 THETA.IND=ATN(VI.MR/VA(1))
7310 IF THETA.IND< THETA.CRIT.HT THEN EPSILON.HT=1! ELSE EPSILON.HT=0
7320 '
7330 WA.HT = VA(3) - EPSILON.HT*VI.MR + D.HT*VA(5)
7340 Z.HT=R2*(ZUU.HT*UU + ZUW.HT*VA(1)*WA.HT)
7350 '
7360 ' Check if horizontal tail is stalled
7370 '
7380 IF Z.HT < R2*ZMAX.HT*UU THEN Z.HT=R2*ZMAX.HT*UU ELSE GOTO 7400
7390 IF STALLOFF=0 THEN LOCATE 21,55 : PRINT "Horizontal tail stall!" : LOCATE 21,46 :PRINT EPSILON.HT:
GOTO 7410
7400 IF STALLOFF=0 THEN LOCATE 21,55 : PRINT "Hor. tail D.K. " : LOCATE 21,46 :PRINT EPSILON.HT
7410 '
7420 ' Compute horizontal tail moments
7430 '
7440 M.HT = Z.HT*D.HT
7450 '
7460 ' ***** Ming *****
7470 '

```

```

7480 '          Check if wing is in main rotor downwash
7490 '          Compute aerodynamic force on wing
7500 '
7510 IF VA(1)<2! THEN EPSILON.WN=1 : GOTO 7540
7520 IF THETA.IND => THETA.CRIT.WN THEN EPSILON.WN=1 ELSE EPSILON.WN=0
7530 '
7540 Z.WN=R2*(ZUU.WN*UU + ZUV.WN*VA(1)*(VA(3)-EPSILON.WN*VI.MR))
7550 X.WN=-R2*(1/(PI*B.WN^2))*(ZUU.WN^2*UU + 2*ZUV.WN*ZUM.WN*VA(1)*(VA(3)-EPSILON.WN*VI.MR) +
ZUM.WN^2*(VA(3)-EPSILON.WN*VI.MR)^2)
7560 '
7570 ' Check if wing is stalled
7580 '
7590 IF Z.WN < R2*ZMAX.WN*UU THEN Z.WN=R2*ZMAX.WN*UU ELSE GOTO 7610
7600 IF STALLOFF=0 THEN LOCATE 22,55 : PRINT "Wing stall!" : LOCATE 22,46:PRINT EPSILON.WN: GOTO 7620
7610 IF STALLOFF=0 THEN LOCATE 22,55 : PRINT "Wing O.K. " : LOCATE 22,46:PRINT EPSILON.WN
7620 '
7630 ' Compute wing moments
7640 '
7650 M.WN = Z.WN*D.WN - X.WN*H.WN
7660 '
7670 ' Compute power into wing induced drag
7680 '
7690 POWER.WN = ABS(X.WN*VA(1))
7700 '
7710 POWER = POWER.MR + POWER.TR + POWER.WN + HP.LOSS*550
7720 '
7730 ***** Vertical tail *****
7740 '
7750 '          Compute aerodynamic forces on vertical tail
7760 '
7770 Y.VT=R2*(YUU.VT*UU + YUV.VT*VA(1)*(VA(2) - VA(6)*D.VT))
7780 '
7790 ' Check if vertical tail is stalled
7800 '
7810 IF Y.VT < R2*YMAX.VT*UU THEN Y.VT=R2*YMAX.VT*UU ELSE GOTO 7830
7820 IF STALLOFF=0 THEN LOCATE 20,55 : PRINT "Vertical tail stall!" : LOCATE 20,47 : PRINT "-" :LOCATE 13,1
: GOTO
7840 '
7830 IF STALLOFF=0 THEN LOCATE 20,55 : PRINT "Vert. tail O.K. " : LOCATE 20,47 : PRINT "-" :LOCATE 13,1
7840 '
7850 ' Compute vertical tail moments
7860 '
7870 L.VT = Y.VT*H.VT
7880 N.VT = -Y.VT*D.VT
7890 '
7900 ***** General force equations *****
7910 '
7920 X.GRAV = -M*GRAV*S5
7930 Y.GRAV = M*GRAV*S4*C5
7940 Z.GRAV = M*GRAV*C5*C4
7950 '
7960 '-----|-----|-----|-----|-----|-----|-----|-----|-----|
7970 ' | gravity | M.R. | FUS. | T.R. | H.T. | WN | V.T. | component|
7980 '-----|-----|-----|-----|-----|-----|-----|-----|

```

```

7990 ' |      |      |      |      |      |      |      |
8000 F(1) = X.GRAV + X.MR + X.FUS + X.WN : ' X-force |
8010 F(2) = Y.GRAV + Y.MR + Y.FUS + Y.TR + Y.VT : ' Y-force |
8020 F(3) = Z.GRAV + Z.MR + Z.FUS + Z.HT + Z.WN : ' Z-force |
8030 F(4) =      + L.MR + L.FUS + L.TR + L.VT : ' L-moment|
8040 F(5) =      + M.MR + M.FUS + M.TR + M.HT + M.WN : ' M-moment|
8050 F(6) =      + N.MR + N.FUS + N.TR + N.VT : ' N-moment|
8060 ' |      |      |      |      |      |      |      |
8070 ' |-----|-----|-----|-----|-----|-----|
8080
8090 F(7)=DC(3) - VA(5)/GAM.DM.16 - BV(7) + DA1DU*VA(1)
8100 F(8)=DC(2) - VA(4)/GAM.DM.16 - BV(8) - DB1DV*VA(2)
8110
8120 Fill force component array
8130
8140 GOSUB 10900
8150
8160 Body Accelerations
8170
8180 AB(1) = - (VB(5)*VB(3)-VB(6)*VB(2)) + F(1)/M
8190 AB(2) = (VB(4)*VB(3)-VB(1)*VB(6)) + F(2)/M
8200 AB(3) = (VB(1)*VB(5)-VB(4)*VB(2)) + F(3)/M
8210 AB(4) = F(4)/IX
8220 AB(5) = F(5)/IY
8230 AB(6) = F(6)/IZ
8240
8250 Integrate Body Accelerations
8260
8270 FOR IX = 1 TO 6
8280 VB(IX) = VB(IX) + ST * (A1 * AB(IX) + B1 * AP(IX))
8290 AP(IX) = AB(IX) : REM SAVE ACCEL PAST VALUES
8300 NEXT IX
8310
8320 Transform to earth (A/C rel to deck) velocities
8330
8340 VE(1) = (VB(1) * C5 + VB(3) * S5) * C4 * COS (XE(6))
8350 VE(2) = VB(2)*COS(XE(6))+VB(1) * SIN (XE(6))
8360 VE(3) = (VB(1) * S5 - VB(3) * C5 ) * C4
8370 VE(4) = VB(4) + (VB(5) * S4 + VB(6) * C4) * TAN(XE(5))
8380 VE(5) = VB(5) * C4 - VB(6) * S4
8390 VE(6) = (VB(6) * C4 + VB(5) * S4) / C5
8400
8410 Integrate earth (A/C relative to deck) velocities
8420
8430 FOR IX = 1 TO 6
8440 XE(IX) = XE(IX) + ST * (A2 * VE(IX) + B2 * VP(IX))
8450 VP(IX) = VE(IX) : REM SAVE VEL PAST VALUES
8460 NEXT IX
8470
8480 TIME=TIME+ST
8490
8500 RETURN
8510

```

APPENDIX B
DEFINITION OF PROGRAM SYMBOLS

A1 Numerical integration constant (Adams-two = 1.5).
A2 Numerical integration constant (trapezoidal = .5).
ALPHA.F Fuselage angle of attack (rad).
AB(1) Body x-axis acceleration (\dot{U}) component (ft/sec²).
AB(2) Body y-axis acceleration (\dot{V}) component (ft/sec²).
AB(3) Body x-axis acceleration (\dot{W}) component (ft/sec²).
AB(4) Body roll axis acceleration (\dot{P}) component (rad/sec²).
AB(5) Body pitch axis acceleration (\dot{Q}) component (rad/sec²).
AB(6) Body yaw axis acceleration (\dot{R}) component (rad/sec²).
AB(7) Lateral tip-path-plane angle (rad).
AB(8) Longitudinal tip-path-plane angle (rad).
AP(i) Past value of AB(i)
B1 Numerical integration constant, 1-A1.
B2 Numerical integration constant, 1-A2.
C4 Cos[XE(4)] or Cos of roll Euler angle.
C5 Cos[XE(5)] or Cos of pitch Euler angle.
C6 Cos[XE(6)] or Cos of yaw Euler angle.
DA1DU Partial of longitudinal flapping to forward velocity
(rad/ft/sec).
DB1DV Partial of lateral flapping to side velocity
(rad/ft/sec).
DC(1) Main rotor collective pitch angle (rad).
DC(2) *LATERAL SWASHPLATE ANGLE*
DC(3) *LONGITUDINAL SWASHPLATE ANGLE*
DC(4) Tail rotor collective pitch angle (rad).
D.FUS Fuselage horizontal position of aerodynamic center (ft).
D.HT
D.HUB Hub horizontal position (ft).

D.TR Tail rotor horizontal position (ft).

DM.DA1 Lumped flapping stiffness due to hinge offset and flapping spring (ft-lb/rad).

EPSILON.HT Flag for rotor downwash on horizontal tail.

EPSILON.WN Flag for rotor downwash on wing.

F(1) Total x-force component (lb).

F(2) Total y-force component (lb).

F(3) Total z-force component (lb).

F(4) Total rolling moment component (ft-lb).

F(5) Total pitching moment component (ft-lb).

F(6) Total yawing moment component (ft-lb).

F(7)

F(8)

GAM.OM.16 One-sixteenth the product of Lock No. and rotor angular rate (rad/sec).

GV(7) Longitudinal tip-path-plane ~~angular rate~~^{angle} (rad/sec).

GV(8) Lateral tip-path-plane ~~angular rate~~^{angle} (rad/sec).

H.FUS Fuselage vertical position of aerodynamic center (ft).

H.HUB Hub vertical position (ft).

H.TR Tail rotor vertical position (ft).

IS Shaft incidence (rad).

KIND Induced velocity factor.

L.FUS Fuselage aerodynamic rolling moment (ft-lb).

L.MR Main rotor rolling moment (ft-lb).

L.TR Tail rotor rolling moment (ft-lb).

L.VT Vertical tail rolling moment (ft-lb).

M Vehicle mass (slug).

M.FUS Fuselage aerodynamic pitching moment (ft-lb).

M.HT

M.MR

M.TR Tail rotor pitching moment (ft-lb).

M.WN

N.FUS Fuselage aerodynamic yawing moment (ft-lb).

N.MR
 N.TR. Tail rotor yawing moment (ft-lb).
 N.VT
 OMEGA.MR Main rotor angular rate (rad/sec).
 OMEGA>TR Tail rotor angular rate (rad/sec).
 P.CLIMB Power loss due to change in potential energy (ft-lb/sec).
 P.INDUCED.MR Power loss due to main rotor induced velocity
 (ft-lb/sec).
 P.INDUCED.TR Power loss due to tail rotor induced velocity
 (ft-lb/sec).
 P.PARASITE Power loss due to fuselage parasite drag (ft-lb/sec).
 P.PROFILE.MR Power loss due to main rotor profile drag (ft-
 lb/sec).
 P.PROFILE.TR Power loss due to tail rotor profile drag (ft-
 lb/sec).
 POWER Total power required (ft-lb/sec).
 POWER.FUS Total power absorbed by fuselage, including parasite
 drag (ft-lb/sec).
 POWER.MR
 POWER.TR
 POWER.WN
 POWER.ROTOR.MR
 R2 One half air density (slug/ft³).
 RHO.ABC.MR Main rotor product of air density, lift-slope, number
 of blades, and chord ().
 RHO.ABC.TR Tail rotor product of air density, lift-slope, number
 of blades, and chord ().
 R.MR Main rotor radius (ft).
 R.TR Tail rotor radius (ft).
 S4 Sin[XE(4)] or Sin of roll Euler angle.
 S5 Sin[XE(5)] or Sin of pitch Euler angle.
 S6 Sin[XE(6)] or Sin of yaw Euler angle.
 ST Step size (sec).
 STALLOFF Stall flag.
 THETA.CRIT.HT

THETA.CRIT.WN
 THETA.IND
 THETA.TWIST Main rotor blade twist (rad).
 THETA.TWIST.TR Tail rotor blade twist (rad).
 THRUST.MR Main rotor thrust (lb).
 THRUST.TR Tail rotor thrust (lb).
 TIME Present time (sec).
 TORQUE.MR Main rotor torque (ft-lb).
 TORQUE.TR Tail rotor torque (ft-lb).
 UU Quadratic airspeed product $VA(1)*VA(1)$ (ft²/sec²).
 UV Quadratic airspeed product $VA(1)*VA(2)$ (ft²/sec²).
 UW Quadratic airspeed product $VA(1)*VA(3)$ (ft²/sec²).
 UP Quadratic airspeed product $VA(1)*VA(4)$ (rad²/sec²).
 UQ Quadratic airspeed product $VA(1)*VA(5)$ (rad²/sec²).
 UR Quadratic airspeed product $VA(1)*VA(6)$ (rad²/sec²).
 VA(1) Airspeed vector along x-axis (ft/sec).
 VA(2) Airspeed vector along x-axis (ft/sec).
 VA(3) Airspeed vector along x-axis (ft/sec).
 VA(4) Angular velocity of relative airmass about x-axis
 (rad/sec).
 VA(5) Angular velocity of relative airmass about y-axis
 (rad/sec).
 VA(6) Angular velocity of relative airmass about z-axis
 (rad/sec).
 VB(1) Inertial (U) velocity vector along x-axis (ft/sec).
 VB(2) Inertial (V) velocity vector along y-axis (ft/sec).
 VB(3) Inertial (W) velocity vector along z-axis (ft/sec).
 VB(4) Inertial angular rate (P) about x-axis (rad/sec).
 VB(5) Inertial angular rate (Q) about y-axis (rad/sec).
 VB(6) Inertial angular rate (R) about z-axis (rad/sec).
 VE(1) Earth axis forward velocity (ft/sec).
 VE(2) Earth axis sideward velocity (ft/sec).
 VE(3) Vertical velocity (ft/sec).
 VE(4) Roll Euler angle rate (rad/sec).

VE(5) Pitch Euler angle rate (rad/sec).
 VE(6) Heading Euler angle rate (rad/sec).
 VG(1) Airmass (gust) velocity along x-axis (ft/sec).
 VG(2) Airmass (gust) velocity along y-axis (ft/sec).
 VG(3) Airmass (gust) velocity along z-axis (ft/sec).
 VG(4) Airmass (gust) angular rate about x-axis (rad/sec).
 VG(5) Airmass (gust) angular rate about y-axis (rad/sec).
 VG(6) Airmass (gust) angular rate about z-axis (rad/sec).
 VI.MR Main rotor induced velocity (ft/sec).
 VI.MR.2 VI.MR squared.
 VI.TR Tail rotor induced velocity (ft/sec).
 VP(i) Past value of VE(i)
 VU.TR.2 VI.TR squared.
 VHAT.2 Intermediate variable in thrust calculations (ft/sec).
 VTA Total airspeed (ft/sec)
 VV Quadratic airspeed product $VA(2)*VA(2)$ (ft²/sec²).
 VW Quadratic airspeed product $VA(2)*VA(3)$ (ft²/sec²).
 WA.FUS Apparent vertical velocity on fuselage (ft/sec).
 WA.HT Apparent vertical velocity on horizontal tail (ft/sec).

 WB Net vertical velocity component relative to the blade
 (ft/sec).WR Net vertical velocity component through the
 actuator disc (ft/sec).

 WR Quadratic airspeed product $VA(3)*VA(6)$ (rad²/sec²).***
 WW Quadratic airspeed product $VA(3)*VA(3)$ (ft²/sec²).
 XE(1) X-axis position (ft).
 XE(2) Y-axis position (ft).
 XE(3) Z-axis position (ft).
 XE(4) Roll Euler angle (rad).
 XE(5) Pitch Euler angle (rad).
 XE(6) Heading Euler angle (rad).
 X.FUS Fuselage aerodynamic x-force (lb).
 X.GRAV X-gravity force (lb).
 X.MR Main rotor x-force (lb).

X.HT Horizontal tail x-force (lb).
 X.WN Wing x-force (lb).
 XUU.FUS Fuselage quadratic drag coefficient along x-axis (ft²)>
 Y.FUS Fuselage aerodynamic y-force (lb).
 Y.GRAV Y-gravity force (lb).
 YMIN.VT Vertical tail stall effect (ft²).
 Y.MR Main rotor side force (lb).
 YBTR Y-axis velocity relative to tail rotor blade (ft/sec).
 YRTR Y-axis velocity relative to tail rotor disk (ft/sec).
 Y.TR Tail rotor side force (lb).
 YUU.VT Vertical tail camber/incidence effect (ft²).
 YUW.VT Vertical tail circulation lift effect (ft²).
 Y.VT Vertical tail side force (lb).

 YVV.FUS Fuselage quadratic drag coefficient along y-axis (ft²)>
 ZMIN.HT Horizontal tail max aero force (stall) coefficient (ft²).
 ZMIN.WN Wing max aero force (stall) coefficient (ft²).

 Z.FUS Fuselage aerodynamic z-force (lb).
 Z.GRAV Z-gravity force (lb).
 Z.HT Horizontal tail z-force (lb).
 Z.MR Main rotor z-force (lb).
 Z.WN Wing z-force (lb).
 ZWW.FUS Fuselage quadratic drag coefficient along z-axis
 (ft²)>
 ZUU.HT Horizontal tail camber/incidence effect (ft²).
 ZUU.WN Wing camber/incidence effect (ft²).
 ZUW.HT Horizontal tail circulation effect (ft²).
 ZUW.WN Wing circulation effect (ft²).

APPENDIX C
DEFINITION OF PROGRAM INPUT AND DATA FILES

Two data sets are defined, first the input data file needed for a specific vehicle and second the computed data file which defines trim and dynamic data for a given flight condition case.

The following describes the input format needed to define the math model for a specific helicopter. The specific values given correspond to the AH-1S example.

```

HE001.DAT
C)TYPE HELDATA.DAT
)*****
*
*          DATA FILE FOR THE AH-1G HELICOPTER PARAMETERS          *
*
******

(CONFIGURATION, AIRCRAFT NAME, FS.CG, WL.CG, WT, IX, IY, IZ)
    001,      "AH-1S",    196,    75, 9000, 2593, 14320, 12330

(FS.HUB, WL.HUB, IS, DM.DA1, SAM.DM.16, R.MR, ABC.MR, RPM.MR, CDO, B.MR, C.TR)
    200,    153,    0,    0,    12.5,    22,    25.65,    324, 0.012, 2, 2.25

(FS.FUS, WL.FUS, XUJ.FUS, YVJ.FUS, ZWJ.FUS)
    200,    65,    -30,    -275,    -41

(FS.WN, WL.WN, ZUJ.WN, ZUW.WN, ZMAX.WN)
    200,    65,    -39,    -161,    -65

(FS.HT, SL.HT, ZUJ.HT, ZUW.HT, ZMAX.HT)
    400,    65,    0,    -80,    -32

(FS.VT, WL.VT, YUJ.VT, YUW.VT, YMAX.VT)
    490,    80,    0,    -62,    -50

(FS.TR, WL.TR, R.TR, ABC.TR, RPM.TR, B.TR, C.TR)
    521.5, 119, 4.25, 9.5, 1661, 2, 0.96

C)

```

The following data set is recommended for assembling information describing several flight conditions. This can be used to construct plots or tables of trim conditions and dynamic characteristics.

CONFIGURATION FILE MASTER

TYPE CONFB101.BAT												
TRIM001START												
1	07-17-1988	16:21:36										
2	0	0	VTA	γ								
3	3.9E76P7E-02	.143846	\dot{p}	δ_{col}								
4	-5.3E58E3E-02	3.2588076	q	a_1								
5	9.94E834E-03	-2.2074E1	r	b_1								
6	-8.04114E-03	.1680021	u	δ_{cr}								
7	-1.205741E-03	-3.942523	v	θ								
8	6.322997E-04	-1.72575E	w	β								
9	-2.75E714	3.23603	g ₁	e_1								
10	7.570571E-02	-2.20142E	b ₁	AI								
11	16673.74	1210.035	Q	HP								
12	35.39741	9056.854	V ₀	T								
13	47.89968	618.9159	V ₀ TR	T.TR								
14	0	0	U	X								
15	0	0	V	h								
16	0	-6.8E1002E-02	289.1391	3.6E8302E-04	3.8E8302E-04	W, ALPHA.F, TORQUE.TR, DBIDV, DAIDU						
17	1	1	EPSILON.WN, EPSILON.HT									
HOREPOWER NUMBERS												
18	757.7582	0	3.9E9296	P.INDEXED.MR	P.CLIMB	P.PARASITE						
19	166.9082	3.529256	0	P.PROFILE.MR	POWER.FUS	POWER.WN						
20	1028.594	70.07203	20.36525	POWER.MR	P.INDEXED.TR	P.PROFILE.TR						
FORCES AND THEIR COMPONENTS												
23	-2.249336	618.8015	-514.7328	0	-106.3181	F(1)	X.GRAV	Y.MR	X.FUS	X.WN		
24	-3372807	-270.3968	-34E.8544	0	618.9159	0	F(2)	Y.GRAV	Y.MR	Y.FUS	Y.TR	Y.VT
25	.1768723	8574.629	-9035.505	61.0E285	0	0	F(3)	Z.GRAV	Z.MR	Z.FUS	Z.HT	Z.WN
26	1.804682	-2267.554	0	2265.355	0	0	F(4)	L.MR	L.FUS	L.TR	L.VT	
	-23.45825	333.9282	20.3E095	-289.1391	0	-83.59E3E	F(5)	M.MR	M.FUS	M.TR	M.HT	M.WN
28	1.525781	1679.02	0	-1673E.09	0	0	F(6)	N.MR	N.FUS	N.TR	N.VT	
29	.143846	-3.842211E-02	5.647938E-02	.1680021	DC(I)							
30	0	0	0	0	0	0	VA(I)					
31	0	0	0	0	0	0	VB(I)					
32	0	0	0	0	0	0	VC(I)					
33	-8.04114E-03	-1.205741E-03	6.322997E-04	6.959844E-04	-1.6E8146E-03	1.5E8166E-04	AB(I)					
34	0	0	0	-3.912913E-02	-5.8E1002E-02	0	XC(I)					
35	5.6E841E-02	-5.8E2781E-02	a_1, b_1									
STABILITY DERIVATIVES (STABILITY AXIS)												
Main Rotor												
38	0.0000	0.0036	0.0000	0.0001	0.0004	0.0000	-33.078	0.031				
39	-0.0007	-0.2925	0.0000	-0.0138	-0.0366	-0.0025	-0.155	-0.436				
40	0.0000	0.0002	0.0000	0.0000	0.0000	0.0000	4.200	-0.002				
42	-0.0001	-0.0115	0.0000	-0.0005	-0.0014	-0.0001	-0.023	33.074				
43	0.0000	-0.0100	0.0000	-0.0005	-0.0011	-0.0001	-0.020	23.154				
44	-0.0003	0.0275	0.0000	0.0011	0.0016	0.0001	0.057	1.345				
46	0.0000	0.0010	0.0000	0.0000	0.0000	0.0000	0.000	0.000				
47	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000				
48	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000				
Fuselage												
50	-0.0002	0.0003	0.0000	-0.0001	-0.0000	-0.0000	-0.001	0.000				
51	0.0007	-0.0041	0.0000	0.0007	0.0002	0.0000	0.016	-0.000				
52	0.0000	-0.0000	0.0000	0.0000	0.0000	0.0000	0.000	-0.000				
54	0.0000	0.0000	0.0000	-0.0000	0.0000	0.0000	0.000	0.000				
55	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000				
56	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000				
58	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000				

59	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
60	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
Tail Rotor								
62	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
63	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
64	-0.0000	-0.0000	-0.0003	0.0004	0.0020	-0.0103	0.000	0.000
66	0.0002	0.0002	0.1534	-0.0188	-0.1205	0.7447	0.000	0.000
67	0.0001	0.0001	0.0570	-0.0082	-0.0527	0.3254	0.000	0.000
68	-0.0001	-0.0001	-0.0900	0.0110	0.0707	-0.4368	0.000	0.000
70	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
71	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
72	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
Horizontal Tail								
74	-0.0008	-0.0008	0.0008	-0.0000	-0.0000	-0.0000	-0.000	0.000
75	0.0120	0.0006	-0.0115	0.0000	0.0000	0.0000	0.001	-0.000
76	0.0040	0.0002	-0.0038	0.0000	0.0000	0.0000	0.000	-0.000
78	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
79	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
80	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
82	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
83	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
84	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
Wing								
86	0.0023	0.0072	0.0000	-0.0006	-0.0004	-0.0000	-0.000	0.000
87	0.0043	0.0017	0.0000	-0.0000	-0.0000	-0.0000	-0.000	0.000
88	0.0002	0.0001	0.0000	-0.0000	-0.0000	-0.0000	-0.000	0.000
90	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
91	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
92	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
94	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
95	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
96	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
Vertical Tail								
98	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
99	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
100	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
102	0.0000	0.0000	0.0000	-0.0005	-0.0005	0.0127	0.000	0.000
103	0.0000	0.0000	0.0000	-0.0000	-0.0001	0.0011	0.000	0.000
104	0.0000	0.0000	0.0000	0.0000	0.0000	-0.0071	0.000	0.000
106	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
107	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
108	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.000
Total Deriv.								
110	0.0012	0.0110	0.0008	-0.0004	0.0000	0.0000	-33.067	0.001
111	0.0042	-0.3002	-0.0115	-0.0134	-0.0321	-0.0025	-0.138	-0.474
112	0.0042	0.0005	-0.0041	0.0004	0.0021	-0.0103	4.260	-0.003
114	0.0002	-0.0113	0.1534	-0.0199	-0.1228	0.7575	-0.023	33.074
115	0.0001	-0.0095	0.0470	-0.0087	-0.0538	0.3264	-0.020	23.154
116	-0.0004	0.0274	-0.0900	0.0125	0.0728	-0.4439	0.057	1.344
118	0.0048	0.0004	-1.0000	-0.0000	-0.0000	-0.0000	-12.500	0.000

119	0.0000	-0.0000	0.0000	-0.0045	-0.9976	-0.0088	0.000	-12.500
120	-4.0251	345.5958	0.0000	14.8438	20.6541	1.4235	714.180	-6.758
Main Rotor								
123	-26.51	-0.00	0.00	0.00	-0.19			
124	-299.33	-0.05	0.00	0.00	-2.10			
125	4.04	0.00	0.00	0.00	0.03			
127	18.50	0.00	0.00	0.00	0.13			
128	11.95	0.00	0.00	0.00	0.08			
129	15.29	0.00	0.00	0.00	0.10			
131	0.00	0.00	0.00	0.00	0.00			
132	0.00	0.00	0.00	0.00	0.00			
133	0.00	0.00	0.00	0.00	0.00			
Fuselage								
135	-0.14	-0.00	0.00	0.00	-0.00			
136	1.98	0.00	0.00	0.00	0.01			
137	0.01	0.00	0.00	0.00	0.00			
139	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00			
141	0.00	0.00	0.00	0.00	0.00			
143	0.00	0.00	0.00	0.00	0.00			
144	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00			
Tail Rotor								
147	0.00	0.00	0.00	0.00	0.00			
148	0.00	0.00	0.00	0.00	0.00			
149	0.00	0.00	0.00	-0.19	0.00			
151	0.00	0.00	0.00	18.34	0.00			
152	0.00	0.00	0.00	8.02	0.00			
153	0.00	0.00	0.00	-10.75	0.00			
155	0.00	0.00	0.00	0.00	0.00			
156	0.00	0.00	0.00	0.00	0.00			
157	0.00	0.00	0.00	0.00	0.00			
Horizontal Tail								
159	-0.01	-0.00	0.00	0.00	-0.00			
160	0.11	0.00	0.00	0.00	0.00			
161	0.04	0.00	0.00	0.00	0.00			
163	0.00	0.00	0.00	0.00	0.00			
164	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00			
167	0.00	0.00	0.00	0.00	0.00			
168	0.00	0.00	0.00	0.00	0.00			
169	0.00	0.00	0.00	0.00	0.00			
Wing								
171	-3.41	-0.00	0.00	0.00	-0.00			
172	-0.01	-0.00	0.00	0.00	-0.00			
173	-0.05	-0.00	0.00	0.00	-0.00			
175	0.00	0.00	0.00	0.00	0.00			
176	0.00	0.00	0.00	0.00	0.00			
177	0.00	0.00	0.00	0.00	0.00			

179	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00
181	0.00	0.00	0.00	0.00	0.00
Vertical Tail					
183	0.00	0.00	0.00	0.00	0.00
184	0.00	0.00	0.00	0.00	0.00
185	0.00	0.00	0.00	0.00	0.00
187	0.00	0.00	0.00	0.00	0.00
188	0.00	0.00	0.00	0.00	0.00
189	0.00	0.00	0.00	0.00	0.00
191	0.00	0.00	0.00	0.00	0.00
192	0.00	0.00	0.00	0.00	0.00
193	0.00	0.00	0.00	0.00	0.00
Total Deriv.					
195	-30.07	-0.01	0.00	0.00	-0.21
196	-297.26	-0.05	0.00	0.00	-2.05
197	4.03	0.00	0.00	-0.19	0.03
199	16.50	0.00	0.00	16.34	0.10
200	11.95	0.00	0.00	8.02	0.08
201	15.29	0.00	0.00	-10.76	0.10
203	0.07	0.00	12.50	0.00	-0.00
204	-0.00	12.50	0.00	0.00	0.00
205	1179712.50	31.25	0.00	0.00	1112.50
TRIM001END					